

Skylight FlexShade System

by **DRAPER**

Please check all appropriate selections and attach room schedule with field verified dimensions.

Select Hardware Finish

- Silver
- Black
- White
- Ivory
- Charcoal Bronze

Select Installation Option (see below)

- Inside Mount
- Outside Mount

Select Operator Location (see below)

- Location A
- Location B
- Location C
- Location D

Select Operator

- Crank Operator with detachable crank.
Specify crank length _____ (6' max.)
Note: Crank operator units operable up to 10 feet above floor.
- Electric Motor

Select Control Options

- 110-120V Wall Switch for Single Shade Control
- Low Voltage and/or Multiple Shade Control: *Please see Draper's IntelliFlex® Controls Reference Sheet to design a control solution for this product. The form is available at www.draperinc.com, or by contacting Draper.*

Select Fabric

Indicate color name & no. _____

- "E" Screen from Mermet _____
- "M" Screen from Mermet _____
- SheerWeave® SW2000/2100 _____
- SheerWeave® SW2400/2500/2600/2900 _____
- SheerWeave® SW3000 _____
- Soltis 99® by Ferarri _____
- SunBloc SB9000 _____
- SunBloc SB9100 _____
- "T" Screen from Mermet _____

**Please see Draper's Shade Fabric Reference Sheet for fabric colors and specifications.*


Maximum SkyLight FlexShade size is 6' wide x 10' high. If larger size is required, contact Draper.

Installation




Operator Locations

Choose location A, B, C or D. For motorized units, Draper standardly supplies 6' motor lead wire. Indicate additional lead if required, up to 16' total.

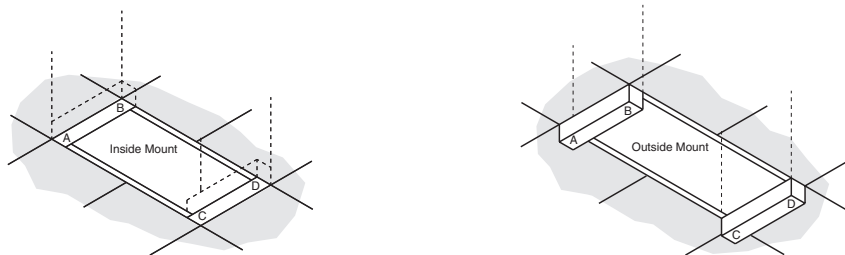

Dimensions

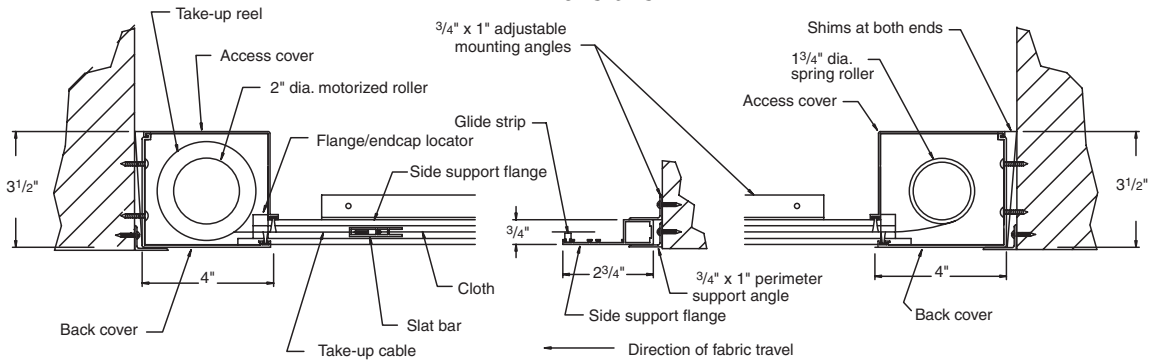

(Inside Mount Installation shown)

DRAPER®

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999
www.draperinc.com ■ fax 765-987-7142

Copyright © 2009 Draper Inc. Form SkyLightFlexShade_Sub09 Printed in U.S.A.

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____

Specifications

Method Of Operation

Crank Operator: Gear box, of die cast aluminum and steel, has ratio of 1.7:1 or 3:1. Bidirectional to mount at either end of the roller. Never needs lubrication or adjustment. Crank handle assembly, of anodized aluminum and chrome plated steel, in overall operating lengths to 6', detachable. Crank roller insert of injection molded nylon and steel is installed in roller and engages to gear box. Maximum width 72"; maximum length 120".

Electric Operator: Drive unit inside roller, 3-wire, instantly reversible, lifetime lubricated. Adjustable limit switches, thermal overload protector and electric brake. Operates on 110-120V AC 1 PH 60 HZ current. Draws 1.1 AMP.

For control options, please refer to IntelliFlex® Controls Reference Sheet.

Hardware

Rollers: Motorized roller size 2" dia. x .080 wall, in extruded aluminum. Spring take-up roller size 1 3/4", institutional quality, with heavy-duty springs, mounted on one-piece electro-galvanized steel roller. Roller assembly easily removable.

Roller Idler Assembly: Injection molded plastic containing a spring-loaded steel pin for easy installation and removal of the roller.

Endcaps: 1018 steel stamping: 3 1/4" x 3 3/4". Complete with adapter roller bracket. Endcaps used for mounting of each headbox (enclosure). Accepts box covers and fabric guides. **Silver (standard)**, black, white, ivory, or charcoal bronze finish available.

Operator and Take-up Enclosures, Side Support Flanges & Slat Bar: 6063-T5 aluminum custom extruded shapes, .060 wall. **Silver (standard)**, black, white, ivory, or charcoal bronze finish available. All contain grooves to accept light seal elements.

Operator and Take-up Enclosures consist of an L-shaped back/top and an L-shaped front/bottom.

Side Support Flange consists of two sections. One section contains grooves for the fabric guide, and a groove for the glide strip, which supports the slat bar, fabric and stays. The second section contains the flange/endcap locators. Outside mounts require plastic cover buttons.

Flange/Endcap Locator: Type 6 injection molded nylon. Aligns side support flange and endcap.

Slat Bar provides an attachment point for the shade fabric and for the cable idler bearings. The idler bearings provide self-adjusting equalization of the cable tension at each end of the slat bar.

Take-up Cable: 3/64" stainless steel, nylon coated, with a minimum breaking strength of 220 lbs. (100 kg); never visible during operation.

Take-up Reel: 1/16" thick, machined 6061-T6 aluminum assures that take-up cable remains in proper alignment.

Fabric Guide: Plated steel. Forms a transition for the fabric as it rolls into the channels, reducing friction.


Opacity Plates: 1018 steel with a rubber "O" ring. Installed on the endcaps of the roller box to eliminate light leakage.

Fabric Support System: Horizontal steel stays are installed at regular intervals and covered. This system enables the shade to withstand reasonable air pressure differentials and gravity. Please note: Extreme air currents or physical interference may cause product failure.

Support Cable(s): .062" dia. stranded steel cable with clear vinyl coating. One end attached at operator enclosure, other end at take-up enclosure, spaced at 21" to 36" intervals. Attachment brackets: 1018 welded steel zinc plated. Turnbuckles are combination of die-cast aluminum and steel. *Units between 36" wide and 72" wide (outside measure) require 1 support cable. Cables may also be used at Draper's discretion.*

Downloadable 3-part specifications are available at www.draperinc.com.

Support Cable Details

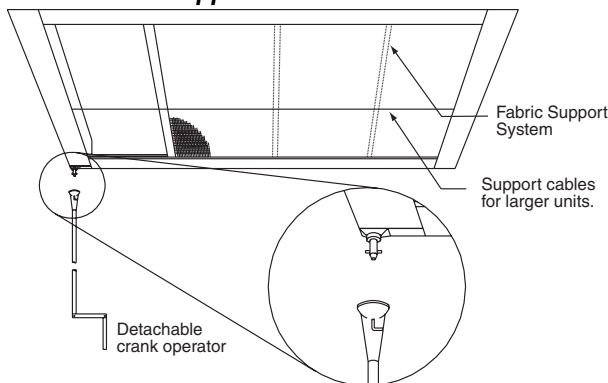

Units between 36" wide and 72" wide (outside measure) require 1 support cable. Cables may also be used at Draper's discretion. Cables are 3/16" diameter vinyl clad aircraft cable. The cables are visible from inside the room at all times.


	Minimum Shade Width	
	Outside Measure	Inside Measure
1 1/2" Spring-Roller	28-5/8"	29-3/8"
1 3/4" Spring-Roller	34-3/8"	35-1/8"
2 1/4" Spring-Roller	48-3/4"	49-1/2"

	Maximum Shade Length	
1 1/2" Spring-Roller	96"	
1 3/4" Spring-Roller	120"	
2 1/4" Spring-Roller	120"	

Maximum SkyLight FlexShade size is 6' wide x 10' high. If larger size is required, contact Draper.


Single Shade Wiring Diagram

For multiple shade or low voltage wiring consult diagrams provided with control.

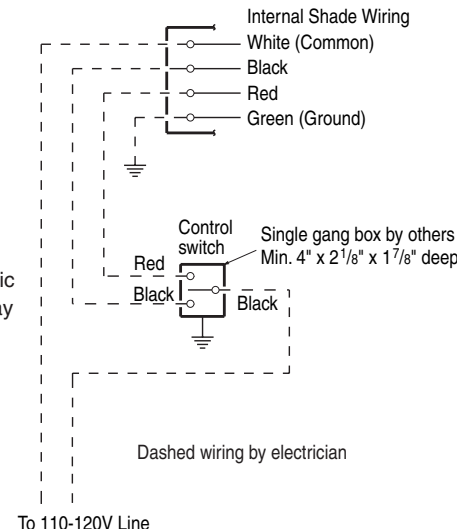

NOTE: Test shade operation. If shade direction does not correspond with the switch orientation, turn power back off and switch the red and black wires from the motor to the switch.

Fabric Support System Details

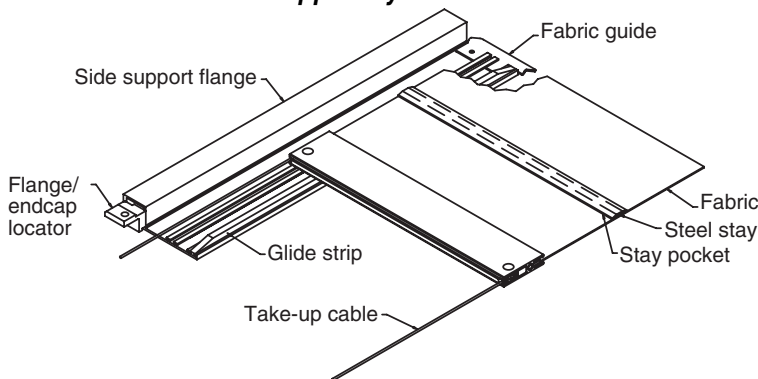

With outside mount installation, separate header bars must be attached at both ends to house the support cable system. With outside mount installation, fabric stay pockets are visible from inside the room on all sizes of SkyLight FlexShades (refer to drawings on page 1).