

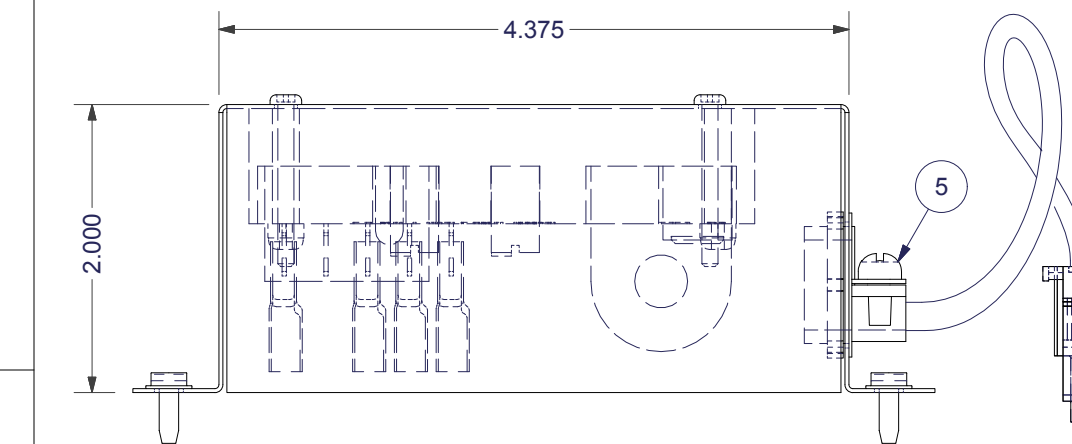


DELAY FEATURE ATTACHED TO LOWER PAN

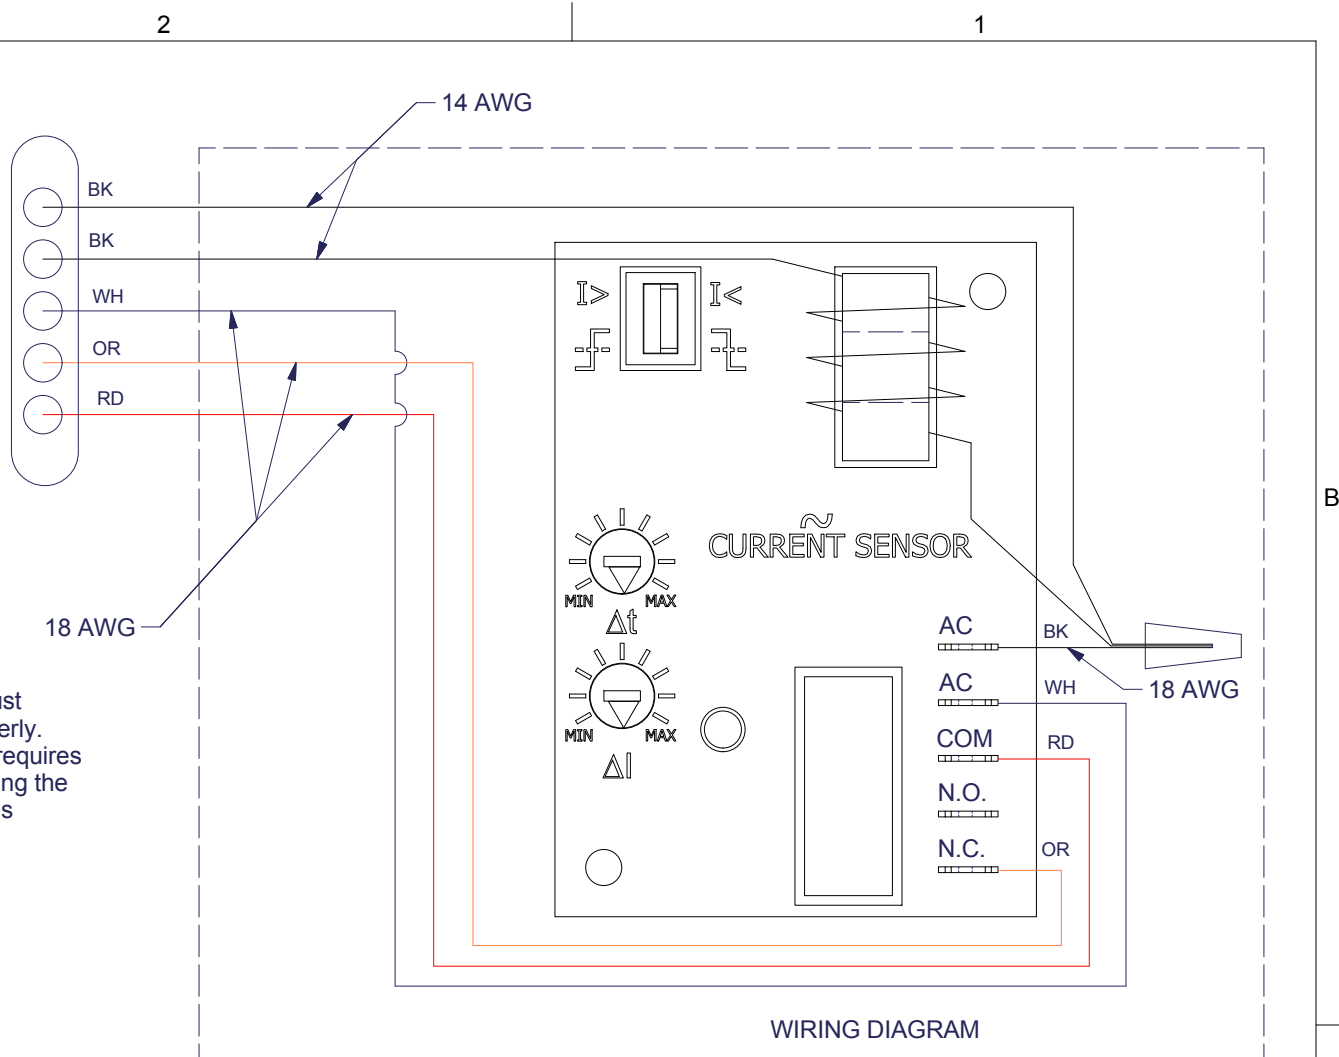

- NOTES:
1. When the Optional Current Sensor is installed the Delay Switch must be in the "Delay On" position for the Delay Feature to operate properly.
  2. If the Optional Current Sensor is installed and the "Show" position requires adjusting the "Delay Switch" must be switched to "Off" while adjusting the show position. Refer to the "Adjusting" section of the Lift instructions for informations on how to adjust the "Show" position.
  3. Return the "Delay Switch" to the "ON" positon.

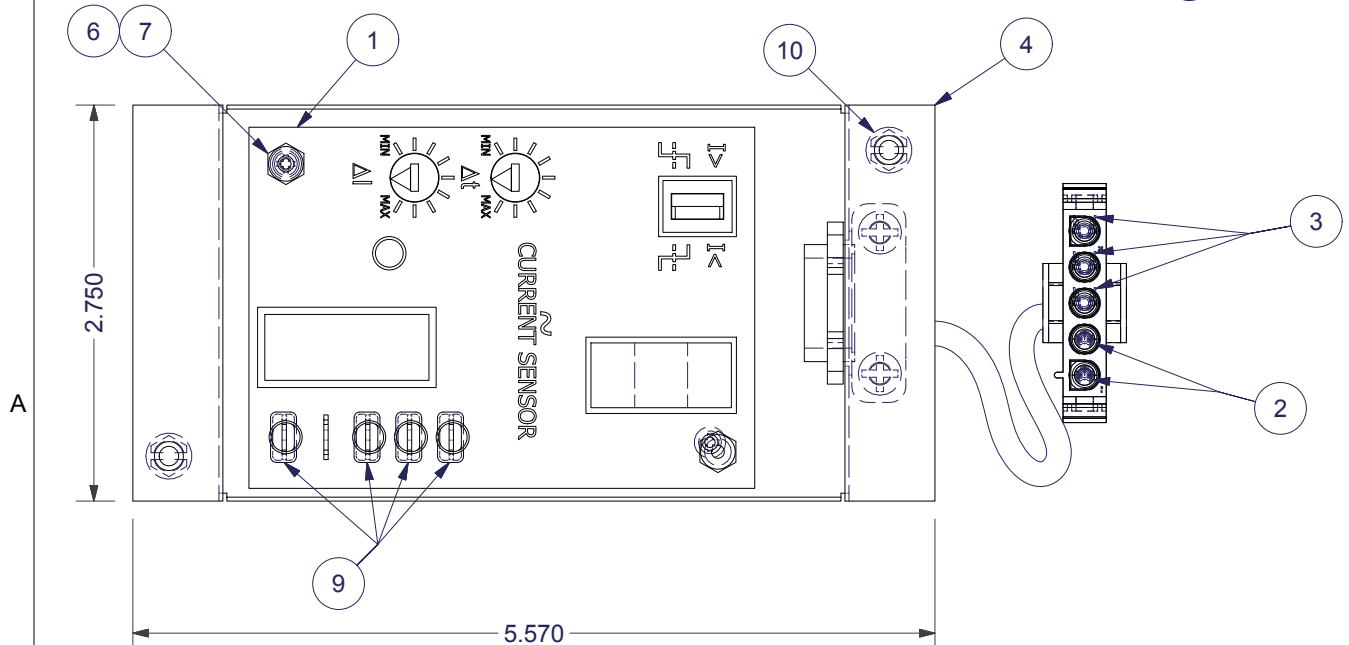

WIRING DIAGRAM

| ITEM | QTY | PART NUMBER   | DESCRIPTION  |
|------|-----|---------------|--|
| 1    | 1   | C232.001      | SENSOR 120V AC CURRENT SSAC MODEL ECS41BC 50/60 HZ UNIVERSAL |
| 2    | 2   | C097.003      | CONNECTOR PIN 24-18 AWG AMP #350561-1 (ACCESS)               |
| 3    | 3   | C097.045      | CONNECTOR PIN 20-14 AWG AMP #350547-1                        |
| 4    | 1   | C108.084.07SA | BOX, CURRENT SENSOR  |
| 5    | 1   | C111.008      | ELECTRICAL CONNECTOR C500 (NEER) 2 SCREW                     |
| 6    | 2   | C020.530      | Screw #4-40 x 1 1/8" Long Phil Pan Hd Stainless              |
| 7    | 2   | C018.084      | Nut, #4-40 Nylon Inserted Lock                               |
| 8    | 1   | C097.014-1    | CONNECTOR PLUG HSG AMP # 350809-1 (ACCESS)                   |
| 9    | 4   | C113.058      | TERMINAL, 22 - 18 AWG .250 W PANDUITt DNG18-250FB LOOSE      |
| 10   | 2   | C020.200      | Screw, 6-32 x .375 HEX WASH HD Type "F"                      |

|   |                      |                       |  |
|---|----------------------|-----------------------|--|
| <p><b>TOLERANCES UNLESS NOTED</b></p> <p>2 PLC. DECIMAL: ±.01"<br/>         3 PLC. DECIMAL: ±.005"<br/>         ANGULAR: ±1°<br/>         FRACTIONAL: ±1/32"</p>  | DESIGNED BY: senochs | 10/5/2012             | <p>DRAPER, INC.<br/>         411 S. PEARL STREET<br/>         SPICELAND, INDIANA 47385-0425<br/>         www.draperinc.com</p> |
|   | DRAWN BY: senochs    | 10/29/2013            |  |
|   | CHECKED BY:          |                       |  |
|   | MFG APPD BY:         |                       |  |
| <p>PROPRIETARY DRAWING NOTICE: THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION OF DRAPER, INC., IS THE PROPERTY OF DRAPER, INC., AND MUST BE RETURNED UPON REQUEST. NEITHER RECEIPT NOR POSSESSION THEREOF CONFERS ANY RIGHT TO OWN, REPRODUCE, USE, OR DISCLOSE IN WHOLE OR IN PART, ANY SUCH INFORMATION WITHOUT WRITTEN AUTHORIZATION FROM DRAPER, INC.</p> |                      |                       | <p>TITLE:<br/>         115 VOLT OPTIONAL CURRENT SENSOR</p>  |
| <p>PAPER SIZE:<br/>         B</p>   |                      | <p>FINISH:</p>        | <p>MATERIAL:</p>   |
| <p>SCALE:<br/>         NONE</p>   | <p>REV: 000</p>      | <p>SHEET: 1 OF: 1</p> | <p>DWG NO. - PART NO.<br/>         300382</p>  |

| 000 | REV | Date | ECO | BY | DESCRIPTION |
|-----|-----|------|-----|----|-------------|
|     |     |      |     |    |             |

REVISION HISTORY