

503019 Portable Basketball System

by DRAPER

Specifications—503019 Portable Basketball System


Portable Basketball System shall be provided by Draper, Inc., of Spiceland, IN.

503019 Portable Basketball System shall provide a competition size 42" x 72" glass backboard and competition breakaway goal on a fully padded portable base. Face of backboard shall be a minimum of 96" from the front of the padded base. Backboard shall be ½" tempered glass with official white border and shooter's square and extruded aluminum frame. Backboard shall be designed so that the basketball rim mounts through the glass into the horizontal extension of the base to reduce stress on the glass during play. The rear surface of the backboard shall be coated with clear polymer laminate to retain glass particles in the case of a broken backboard. Rim shall have continuous netlocks and a safety padded front cover plate. Backboard padding shall be bolt-on molded urethane with steel inserts molded into the padding. Padding shall be available in choice of 12 colors. Entire system shall meet all rules for high school and collegiate play.

Backboard and goal shall be suspended by means of a pivoting, welded steel structure that uses extension spring technology to counterbalance the weight of the backboard and goal to raise and lower the goal for play and storage. Primary structural steel components shall be a minimum of 4" x 4" and 4" x 2" tubing with a minimum ¼" wall thickness. Horizontal extension arm shall be reinforced by no less than two ¼" thick steel members for no less than 7' of the arm length. All pivot points to facilitate lowering for storage shall be 1¼" steel pivot pins riding on oil impregnated bronze bearings. Welded base shall provide a fully enclosed ballast compartment that is properly loaded with steel ballast at the factory. Goal shall be raised and lowered by one person and locked at the desired rim height or storage position by means of a telescoping height adjustment mechanism that has permanent rim height markings. Rim shall be capable of height settings from 5' to 10' in 6" increments. All steel components shall have a white polyester powder coated finish. Entire basketball system shall rest on the floor when in the storage position on four (4), 8" diameter, 2" wide urethane casters. When rolled into playing position, front of system shall be lifted from the front wheels onto two 4" diameter urethane stabilizer pads. Stabilizer pads shall be lowered by means of a threaded lead screw located at the top front corners of the base.

Entire front and sides of the base and front of the structural upright shall be padded a minimum of 2" thick in choice of 12 colors. Lower surface of horizontal extension arm shall be padded to a distance of 60" from the rear of the backboard. Front locator pins and floor locator bushings and rear hold-downs shall be standard with the system. System weight shall be approximately 2,300 lbs. The padded base shall be approximately 40" wide x 74" long. The total stored dimension shall be approximately 76" wide x 130" long x 78" high.

Components shall carry the following minimum warranties. Backboard, limited lifetime; Structure, 10-year limited; Padding, 5-year and Breakaway Goal, 5-year.

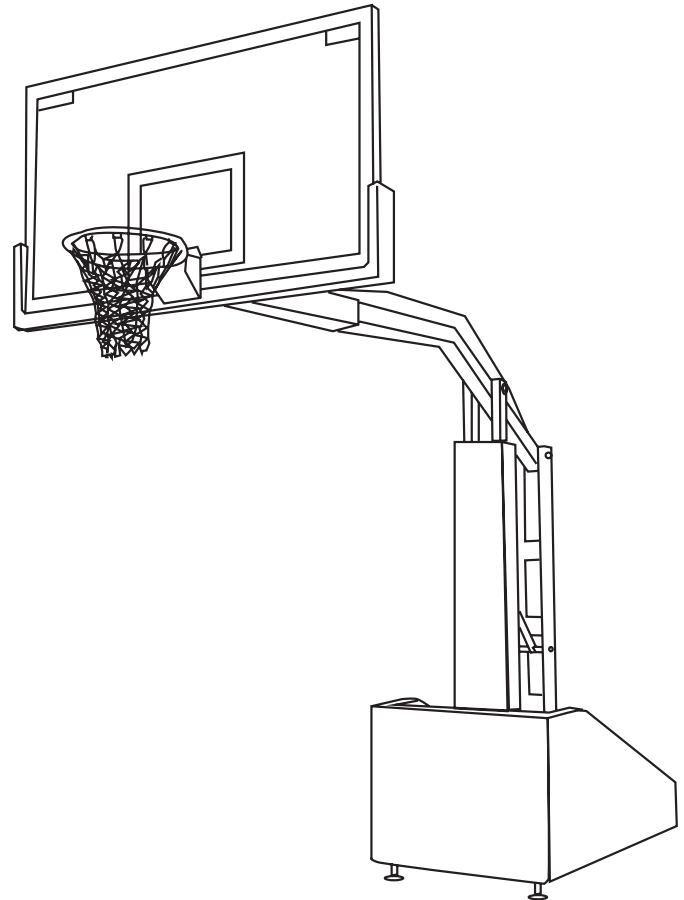

Please Mark Appropriate Selections

Select Padding Color

- Royal Blue
- Scarlet
- Black
- Maroon
- Navy*
- Forest Green*
- Gold*
- Purple*
- Orange*
- Kelly Green*
- Columbia Blue*
- Grey*

* These colors may require longer lead time. Contact Draper, Inc. for details.

DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999 ■ fax 765-987-7142
 e-mail draper@draperinc.com ■ www.draperinc.com
 Copyright © 2004 Draper Inc. Form 503019-PortableBasketball_Sub04 Printed in U.S.A.

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____

Dimensions—503019 Portable Basketball System

