

EZ Fold® A0137

Downsize Rectangular
Glass Backboard

by DRAPER

Specifications—EZ Fold A0137 Downsize Rectangular Glass Backboard

Product Description

Backboard shall be 54" x 40". Backboard frame shall be of a heavy, brushed aluminum extrusion for maximum durability. Extruded frame section shall be of high tensile aluminum (6063-TS). Ends of frame extrusions to be mitered and fitted with a flush, plated steel gusset type mounting bracket on all four corners, incorporating keyhole slots for mounting the backboard to the support structure. Entire frame including goal mounting structure fitted with shock absorbing neoprene material to cushion and protect the glass section.

Goal mounting structure of a heavy, formed steel assembly which is secured to the lower horizontal frame member to minimize stress on the glass section. Special steel sleeves provided at the goal mounting hole locations secure rear structure to front mounting plate, forming a unitized assembly to minimize shock to the glass. Entire frame including goal mounting structure fitted with a shock absorbing neoprene material to cushion and protect the glass section.

Goal mount structure provided with four holes ($7/16"$) to secure backboard and goal to an optional direct mount "goal brace" feature which relieves all stress and shock on the backboard conforming to the latest NCAA Rules (BR-73, D-5).

Glass provided in $1/2"$ thick, fully tempered (heat-treated) glass section with uniform load and impact strength. Official white border and target area is "fired in" permanently on front side of glass section so that it cannot wear away.

Goal mounting holes (4) to be on standard 5" (horizontal) x 5" (vertical) mounting centers. Use with Draper, Inc. No A0576 Breakaway Goal, No. A0581 Breakaway Goal with Tube-Tie Attachment, No. A0570 Standard Goal, or A0572 Heavy Duty Goal.

Backboard shall have a lifetime limited warranty when installed on an EZ Fold basketball backstop. Contact Draper, Inc. to request the full warranty text.


Optional 503253 Backboard Safety Padding

Optional padding shall protect the bottom and 15" up each side of the backboard to meet all NCAA, NFSHSA, and professional requirements.

Padding of a durable neutral gray, open cell foam material providing a full 2" thickness from the bottom and sides of the backboard frame. The front and back surfaces of the backboard frame shall be further protected by a 1" thick lip extending $3/4"$ up from bottom and sides of backboard.

Padding shall be permanently secured to the backboard frame by an easily applied high strength glue. Glue and brush provided.

Installation on this backboard requires pad to be cut to length and seamed in middle.

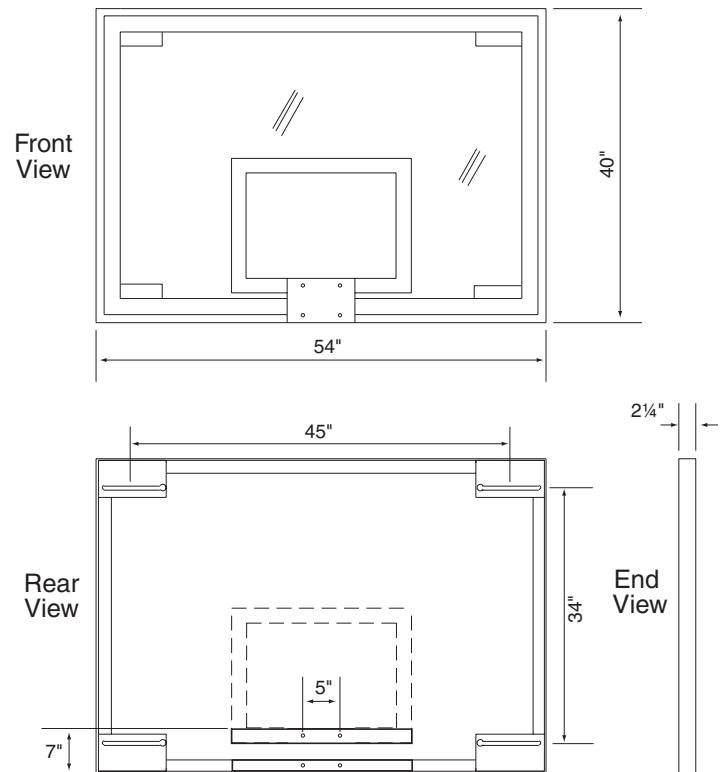

DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999
www.draperinc.com ■ fax 765-987-7142

Copyright©2007 Draper Inc. Form EZ-A0137_Sub07 Printed in U.S.A.

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____