

5⁹/₁₆" OD Permanent/ Semi-Permanent Football Goalposts

High School and Collegiate
Goalposts and Accessories

by **DRAPER**

Please Mark Appropriate Selections

Select Goalposts




- 505122—5⁹/₁₆" OD White High School
- 505123—5⁹/₁₆" OD Yellow High School
- 505124—5⁹/₁₆" OD White Collegiate
- 505125—5⁹/₁₆" OD Yellow Collegiate

Optional Goalpost Pads—5051xx

- | | |
|--|--|
| <input type="checkbox"/> Marine Blue-02 | <input type="checkbox"/> Maroon-09 |
| <input type="checkbox"/> Red-04 | <input type="checkbox"/> Dark Blue/Royal Blue-10 |
| <input type="checkbox"/> Orange-06 | <input type="checkbox"/> Black-11 |
| <input type="checkbox"/> Yellow/Gold-07 | <input type="checkbox"/> Purple-12 |
| <input type="checkbox"/> Grey-08 | <input type="checkbox"/> Forest Green-13 |
| <input type="checkbox"/> Navy Blue-15 | <input type="checkbox"/> Kelly Green-14 |
| <input type="checkbox"/> Custom Color: _____ | |

Other Options

- Optional Ground Sleeve 505101—5⁹/₁₆" OD

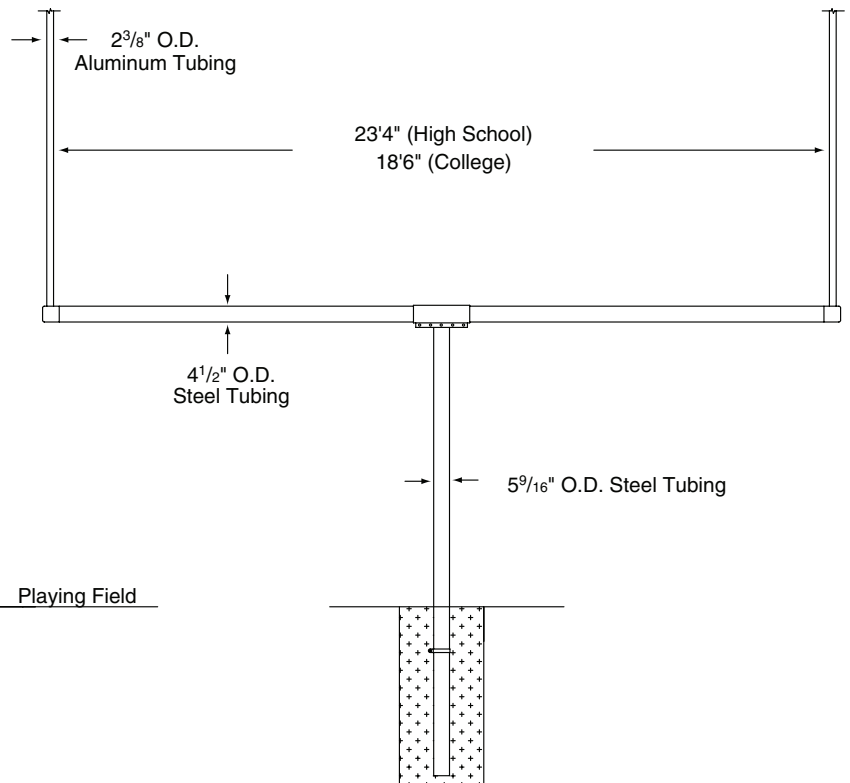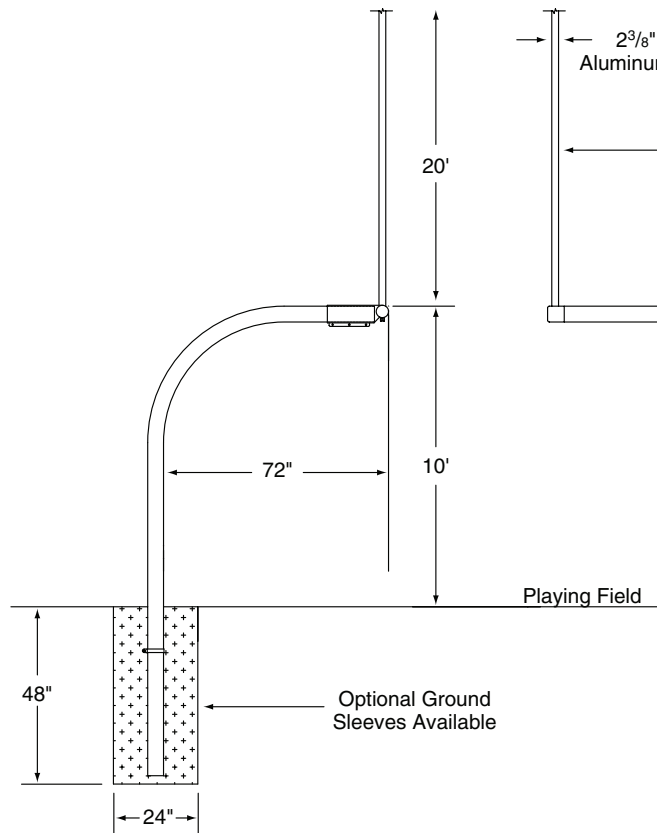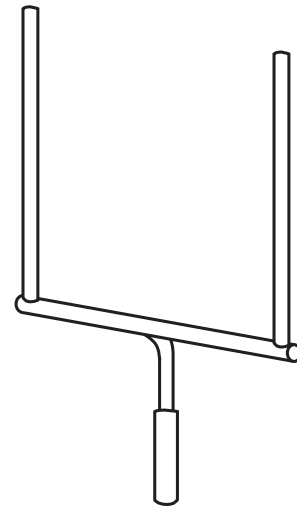

DRAPER[®]

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999
www.draperinc.com ■ fax 765-987-7142
Copyright © 2009 Draper Inc. Form 5⁹/₁₆"PermSemiPermFootballGoalposts_Sub09 Printed in U.S.A.

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____

5⁹/₁₆" OD Permanent/ Semi-Permanent Football Goalposts

Specifications—5⁹/₁₆" Gooseneck High School Permanent/ Semi-Permanent Goalposts

Gooseneck High School Goalposts shall be provided by Draper, Inc., of Spiceland, IN.

Goalposts shall meet all National High School Federation rules. Goalposts shall be of the single bent post design and provide a minimum of 72" of setback from the front of the post to the front of the horizontal crossbar. The bent post shall be a minimum of 5⁹/₁₆" outside diameter steel tube with a minimum thickness of .25" and provide for no less than 48" bury into the ground.

Horizontal crossbars shall be no less than 4½" outside diameter steel tube with a minimum wall thickness of .25" and be of a length to allow uprights to extend upward with official high school 23'4" between the upright members. Two vertical uprights shall rise a minimum of 20' above the top of the crossbar. Uprights shall be constructed of 2³/₈" diameter with a minimum 0.375" wall thickness. Uprights shall be connected to each end of the crossbar by means of an insert that allows the angle of the uprights to be adjusted at the time of field installation. The insert design shall allow rain to escape through the insert from the top of the uprights.

The crossbar shall be attached to the bent post by means of an adjustable "T" adapter that allows field adjustment of the horizontal crossbar for ease and accuracy of installation.

All steel and aluminum members shall have a powder coated finish (white or safety yellow). All hardware shall be zinc plated grade 5 minimum. Optional features include ground sleeves and safety padding. Shipping weight approximately 1200 lbs. per pair.

Specifications—5⁹/₁₆" Gooseneck College Permanent/Semi-Permanent Goalposts

Gooseneck College Goalposts shall be provided by Draper, Inc., of Spiceland, IN.

Goalposts shall meet all NCAA rules. Goalposts shall be of the single bent post design and provide a minimum of 72" of setback from the front of the post to the front of the horizontal crossbar. The bent post shall be a minimum of 5⁹/₁₆" outside diameter steel tube with a minimum wall thickness of .25" and provide for no less than 48" bury into the ground.

Horizontal crossbars shall be no less than 4½" outside diameter steel tube with a minimum wall thickness of .25" and be of a length to allow uprights to extend upward with official college 18'6" between the upright members. Two vertical uprights shall rise a minimum of 20' above the top of the crossbar. Uprights shall be constructed of 2³/₈" diameter aluminum with a minimum 0.375" wall thickness. Uprights shall be connected to each end of the crossbar by means of a machined aluminum insert that allows the angle of the uprights to be adjusted at the time of field installation. The insert design shall allow rain to escape through the insert from the top of the uprights.

The crossbar shall be attached to the bent post by means of an adjustable "T" adapter that allows field adjustment of the horizontal crossbar for ease and accuracy of installation.

All steel and aluminum members shall have a powder coated finish (white or safety yellow). All hardware shall be zinc plated grade 5 minimum. Optional features include ground sleeves and safety padding. Shipping weight approximately 1100 lbs. per pair.

Specifications—505101 Optional Deluxe Adjustable Height Goalpost Ground Sleeves

Sleeves shall be specifically designed to allow removable and adjustable installation of Draper gooseneck style football goalposts.

Sleeves shall consist of steel tubing, a minimum of 50" long. Sleeve shall be galvanized.

Sleeve design shall allow for goalpost crossbar height adjustment to allow exact 10' official crossbar height.

Post shall be adjusted plumb by means of adjusting screws. An anti-rotation device shall hold the goalpost square to the field. Specify that sleeve is used for 5⁹/₁₆" OD goalposts. Shipping weight shall be 170 lbs each.

Specifications—Goalpost Padding

Padding shall meet all NCAA and National High School Federation rules. Foam shall be a minimum of 5" thick and be covered with sewn vinyl covering in 12 colors. Height shall be 72" minimum and be designed to attach by means of Velcro fasteners to all goalposts up to 5⁹/₁₆" diameter or 4" square. Shipping weight shall be 20 lbs each.

**Downloadable 3-part specifications
are available at www.draperinc.com.**