


Walk-Draw Divider

Manually Operated
Gym Divider Curtain

by

DRAPER

Section Drawing

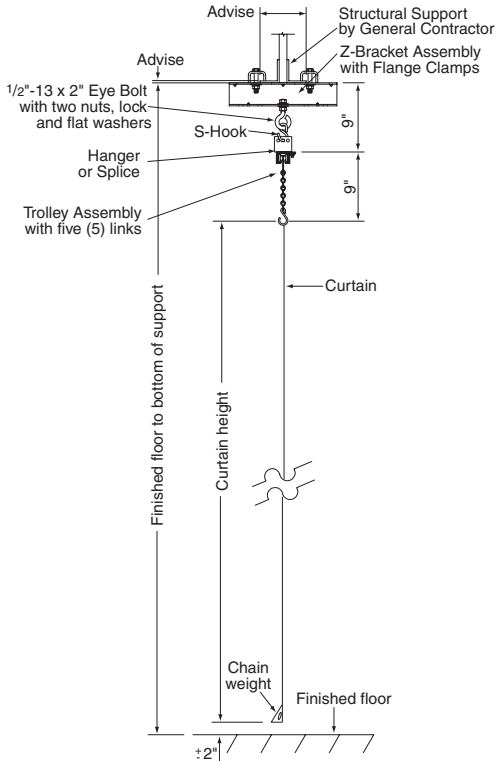

Part of the Draper
EcoVision™ range
of products

Please Mark Appropriate Selections Select Solid Vinyl Weight and Color

Specify Height of Vinyl: _____

- 18 oz. (circle one)
 White Marine Blue Forest Green Yellow Orange
 Black Red Dark Blue Maroon Beige Grey

- 22 oz. (circle one)
 Red Dark Blue Grey

Select Mesh Color (circle one)

- White Red Blue & Black Weave Yellow
 Black Grey

Specify Width

Opening Width: _____

Divider Curtain Width: _____

Specify Height

Height (floor to attachment): Low Point: _____ High Point: _____

Obstructions (clarify on page two in NOTES): _____

Building Structure in Relation to Curtain

- Directly under continuous beam
 Between two beams. Distance between the beams: _____
 Distance from beam to curtain: _____
 Right Angle to beams. Spacing between beams: _____

Building Structure for Curtain Support

Beam flange width: _____

Beam flange thickness: _____

Optional Curve Sections

- 45° How Many? _____
 90° How Many? _____

DRAPER®

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999

www.draperinc.com ■ fax 765-987-7142

Copyright © 2009 Draper Inc. Form Walk-DrawDivider_Sub09 Printed in U.S.A.

Specifications—Walk-Draw Divider

Lower section of curtain shall be solid vinyl coated polyester (avg. 18 oz. or 22 oz. per square yard as required). Flammability rated as self extinguishing by the California State Fire Code and Class A Rated in accordance with requirements of NFPA-101. All seams to be electronically welded with a 1" full contact weld. Outer edge hems shall be triple turned with double welds. A pocket shall be formed along the bottom edge of the curtain to accommodate No. 2/0 coil proof chain.

Upper section of curtain shall be Vinyl coated polyester mesh woven from pigmented vinyl and 840 denier polyester, 20%. Vinyl coated polyester mesh flammability rated as self extinguishing by the California State Fire Code and Class A Rated in accordance with requirements of NFPA-101. Color shall be chosen from standard offering as specified by the owner. Vinyl fabric, double thickness, 3" wide with double welds, shall form the top edge of the curtain. Grommets, located 12" on center for attachment to carriers, shall be rolled rim spur type.

Draper 18 oz. Divider Curtain Vinyl and Divider Curtain Mesh has been submitted to IAQ (indoor air quality) evaluation using a GREENGUARD™ product evaluation protocol following the requirements of The GREENGUARD Environmental Institutes (GEI) Product Certification Program, ASTM Standard D5116 and the United States Environmental Protection Agency and modeled based on GEI requirements for a standard gymnasium loading and ASHRAE 62.1 – 2004 ventilation conditions. Material qualifies as low emitting and found to meet all of the requirements of the GREENGUARD for Children and Schools and GREENGUARD certification program which are emissions of total volatile organic compounds ≤ 0.22 mg/m3, formaldehyde ≤ 0.0135 ppm, total aldehydes ≤ 0.043 ppm, individual volatile organic compounds ≤ 1/1000 TLV and ≤ 1/2 chronic REL and total phthalates ≤ 0.01 mg/m3.

Track to be heavy duty, 16 ga. galvanized steel, 1 1/2" x 1 1/4". Track suspension spacing with flange clamps and Z-brackets shall not exceed 8'-0" on center. Carriers shall be 1 1/8" diameter ball bearing wheels. Spacing shall be approximately 12" on centers. Carriers shall be attached to a trim chain that is fastened to the grommets in the top of the curtain.

STACK SPACE FOR STORAGE


Stack space for curtain shall not exceed 1 1/8" per carrier.

HANGING WEIGHT

1/2 pound per square foot.

LEED® Submittal Information

Credit	Measure	
MRc4 – Recycled Content	Post Consumer Average 23.48%	Post Industrial 0%
MRc5 – Regional Materials	Product Manufactured in Spiceland, IN 47385	



Optional 90° Curve



Optional 45° Curve

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____

