

Overview

The AV Gateway is used to integrate with 3rd party control systems such as Lutron, Crestron and others.

Features


- Supports RS-232 and RS-485
- 6 Contact closure inputs
- Low voltage trigger
- IR receiver input
- LCD display allows for commissioning of serial groups



Technical Specifications - AV Gateway

Material:	ABS plastic	
Operating Temp:	Ambient	
Dimensions:	4 7/8" x 3" x 1"	124 x 76 x 25mm
Mounting:	Mounting Hardware Provided	
Shipping Weight:	1 lb.	0.45 kg
	Approved for use in plenum spaces	
	Indoor Use Only	
	NDC Required (included)	

IntelliFlex I/O the complete control solution for Motorized FlexShades®

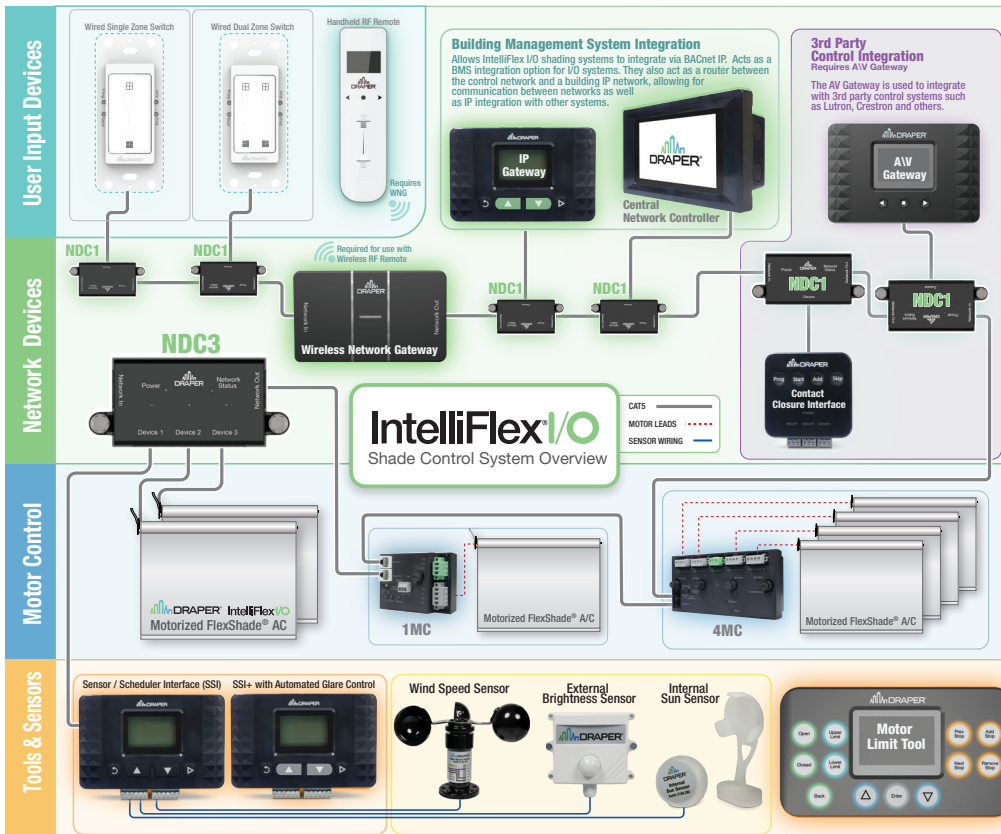

IntelliFlex I/O Compatible Components

	Part Number	
User Input Devices	Single Zone Wired Wall Switch (S1)	C112.161
	Dual Zone Wired Wall Switch (S2)	C112.162
	Handheld RF Remote (RFR)	C156.270
Network Devices	Network Device Connector (NDC1)	C156.267
	3-Port Network Device Connector (NDC3)	C156.311
	Wireless Network Gateway (WNG)	C156.268
	AV Gateway (AVG)	C156.269
	Sensor/Scheduler Interface (SSI)	C156.272
	SSI w/ Automated glare control (SSI+)	C156.304
	Contact Closure Interface (CCI)	C156.273
I/O Motors & Motor Controllers	Central Network Controller (CNC)	C156.271
	IP Gateway (IPG)	C156.305
	6nM I/O Motor	C047.300
	15nM I/O Motor	C047.303
Tools & Sensors	1 Motor Controller (1MC)	C156.285
	4 Motor Controller (4MC)	C156.286
	Motor Limit Tool (MLT)	C202.060
	IntelliFlex I/O Installation Kit (IO-Kit)	C504.206SA
	Internal Sun Sensor (ISS)	C156.282
Wind Speed Sensor (WSS)	C156.278	
External Brightness Sensor (EBS)	C156.279	

For info on other I/O compatible products, visit draperinc.com.

For low voltage wiring requirements, Draper recommends consulting with a professional low voltage electrical contractor.

All low voltage wiring must be run separately from line voltage wiring.