

C156.286SA
4MC With ENCLOSURE

Overview

The 4MC is a 4 motor controller that can be used with motorized roller shades, Venetian blinds and louver systems. Each port is independently operated and can be configured to respond to wall switches, RF remotes and signals from 3rd party systems.

Features

- Robust RS-485 network with built in network termination
- Pluggable terminal blocks for easier wiring
- Comes packaged in a metal enclosure ready for installation

Technical Specifications - 4 Motor Controller

Input Power: 110-230VAC @ 50 / 60Hz

Output Power: Maximum 4A @ Input Voltage

Fuse: 5x20mm 250V Slow Blow 125% of Load

Material: ABS plastic

Operating Temp: 32 - 140 ° F 0 - 60° C


Dimensions: 3½" x 7" x 1 7/8" 89 x 178 x 48mm

Enclosure: 8" x 8" x 4" 203 x 203 x 102mm

Shipping Weight: 2 lb. 0.9 kg

Network Bus: RS-485

Indoor Use Only

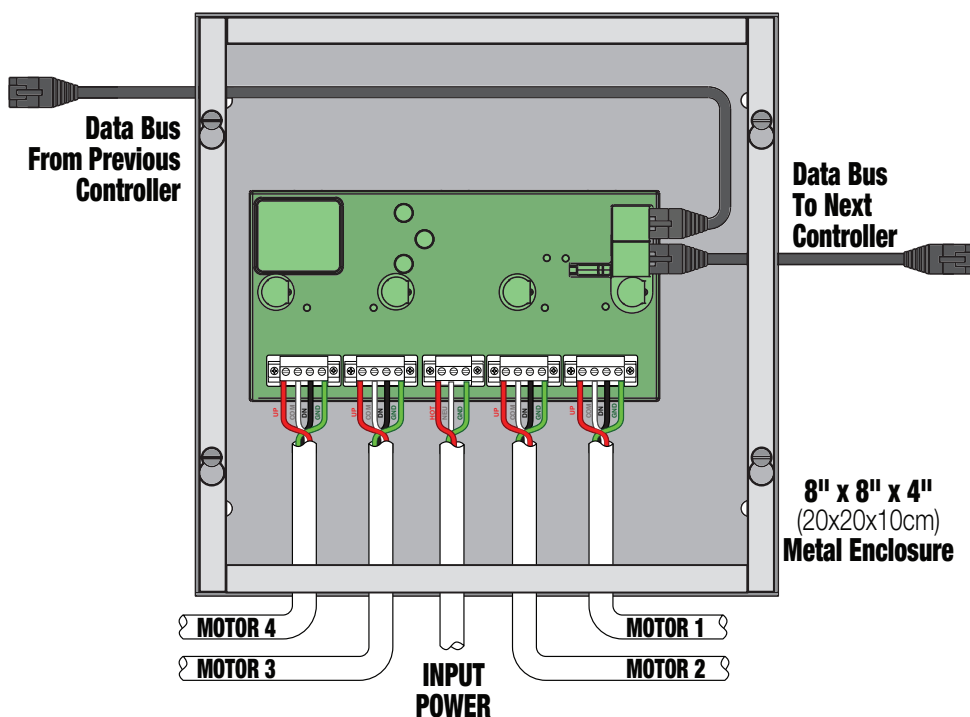

For low voltage wiring requirements, Draper recommends consulting with a professional low voltage electrical contractor.

All low voltage wiring must be run separately from line voltage wiring.