OPTIVIEW MATT WHITE XT1000E

SELF-SUPPORTING SCREEN SURFACE

EXTRA WIDE VIEWING CONE / TYPICAL CONTRAST / ON-AXIS GAIN OF 1.0

The standard to which all other screen surfaces are compared. Preferred viewing surface in educational and commercial markets. A matt white surface diffuses projected light in all directions, so the image can be seen from any angle. Offers accurate color rendition, and superior clarity due to its smooth, non-embossed surface. Requires adequate provision for the control of ambient light in the audience area. Unity gain with a panoramic 180° cone. This surface is GREENGUARD Gold certified.

SURFACE CHARACTERISTICS

Maximum Height Without Seams: 15' Width Thickness (mm) Weight (g/sm) 96" 0.35 450 960 000" 0.40

<96"	0.35	450
96-98"	0.46	490
120-121"	0.46	490
129"	0.46	490
197"	0.74	800

- Cleaning: Mild soap and water
- Flame Retardant Standard: NFPA-701
- Composition: Fiberglass base laminated with PVC¹

REFLECTIVE PERFORMANCE²

 Gain Chart—See below
0° Gain: 1.0
Half Gain Angle: Material does not reach half gain.


¹Composition may differ slightly for some screen sizes/models.

²Individual test results may vary. Results based on a representative sample in Draper inventory.

OptiView Family of Surfaces

The OptiView family features front projection surfaces generally installed on operable roller screens with a dowel. The surfaces are self-supporting and do not require tensioning to lay flat. Most surfaces in this group have a tear proof fiberglass base textile. OptiView surfaces are extremely sturdy for use in a variety of settings. All are 4K ready.



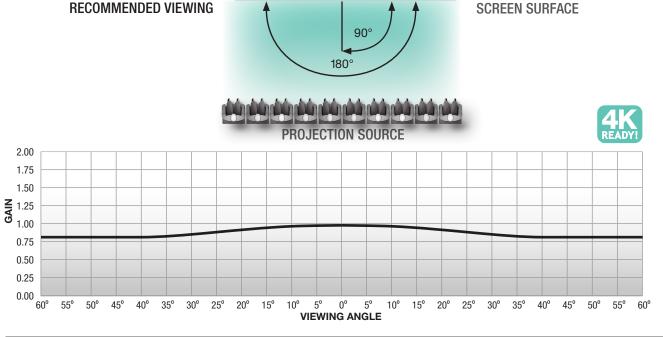

GAIN CHART: 0° GAIN: 1.0, VIEWING CONE: 180° OPTIVIEW MATT WHITE XT1000E



TECHNICAL DATA SHEET AV

OPTIVIEW MATT WHITE XT1000E

SELF-SUPPORTING SCREEN SURFACE

