
MANUAL FlexShade® Twin Pull

BENEFITS OF BEAD CHAIN OPERATION IN A CHILD SAFE DESIGN



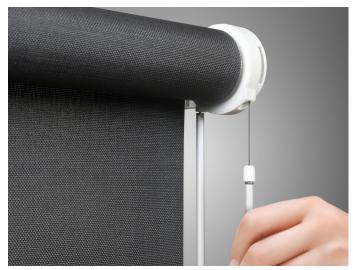

Twin Pull LEFT: Showing 20" length wands, ABOVE: showing operation

A light-duty manual shade, the FlexShade® Twin Pull provides all the benefits of bead chain operation in a child safe design. Twin pull wands on both sides of the clutch eliminate the continuous loop present in most clutch-operated shades. The clutch mechanism operates via the two pull wands to raise and lower the window shade. With bi-directional mounting, the pull wands can be mounted on either the right (standard) or the left end of roller. The extruded aluminum roller assembly is easily accessible for service.

FEATURES

- Pull wand clutch operator never needs adjusting.
- Available with 1 ½" (38 mm) mounting brackets only – no fascia or cassette options. Brackets do not require additional adapters.
- Brackets available in white or black to match clutch color.
- Includes Standard Hem Bar–sealed end with 1" (25 mm) aluminum elliptical slat inside of a 1 %" (41 mm) pocket.
- Twenty-five year warranty.

OPTIONS

Also available with:

- Standard Hem Bar-open end with 1"
 (25 mm) aluminum elliptical slat inside of a 1 ⁵/₈" (41 mm) pocket.
- Exposed Hem Bar-Small Rectangular with a ⁷/₈" x ⁵/₁₆" (22 mm x 8 mm) rectangular aluminum hem bar with plastic endcaps.
- Exposed Hem Bar-Large Rectangular with a 1 ½" x 5/6" (38 mm x 8 mm) rectangular aluminum hem bar with plastic endcaps.
- Exposed Hem Bar-Round with a ¾" (19 mm) round aluminum hem bar with round plastic endcaps.

SIZES

- Available in sizes through 8' (244 cm) wide.
- Pull wands available in 20" or 40"
 (51 cm or 102 cm) length.

FABRIC OPTIONS

draperinc.com/windowshades/fabricoptions.aspx

WARRANTY

draperinc.com/warranty.aspx

SUPPORTING DOCUMENTS

All instructions, technical drawings and other supporting documents are located at: draperinc.com/documents.aspx

For more information on this product visit: draperinc.com/windowshades/manualshades.aspx

