

Installation Instructions

Revelation Shield by Draper

Caution

- ① Read instructions completely before proceeding.
 - ② Follow instructions carefully. Installation contrary to instructions invalidates warranty.
 - ③ Keep body parts out of the Revelation door opening while power is connected to the Revelation. Serious injury could occur if door closes.
 - ④ Make sure power is disconnected BEFORE beginning installation. Do not make adjustments while power is connected.
 - ⑤ Take great care when handling glass shield. If cleaning is necessary, do so very lightly with glass cleaner and a soft, lint free cloth.
 - ⑥ Use caution when working near first surface mirror. Do not allow glass shield to come in contact with first surface mirror.
 - ⑦ Make sure glass shield is up before before operating Revelation.
- Tools required: 1 small Philips screwdriver; 1 1/16" hex key; 1 3/32" hex key.

- ① Unpack and inspect the Revelation Glass Shield for damage (see Fig. 1).

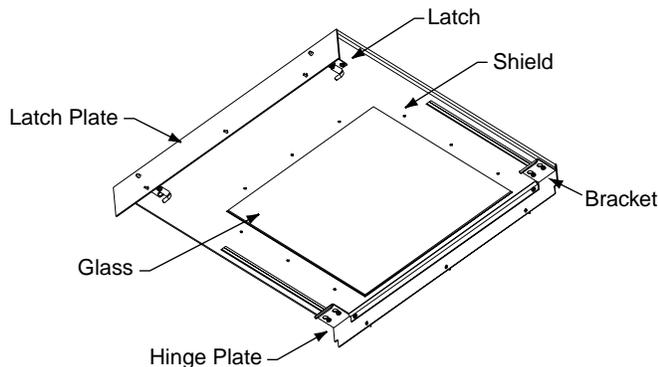


Figure 1

- ② Remove brackets at each end of the slots by loosening screws and sliding bracket off. Leave screws attached to make it easier to reattach brackets.
- ③ Open the Revelation door.
- ④ Disconnect power to the Revelation.

Caution: You should not allow any body parts to enter the Revelation door opening while power is connected to the Revelation. Serious injury could occur if the door were to subsequently close.

- ⑤ Remove three 4-40 Philips flat head screws in door trim frame at both the hinged and opened ends of Revelation door (see Fig. 2).

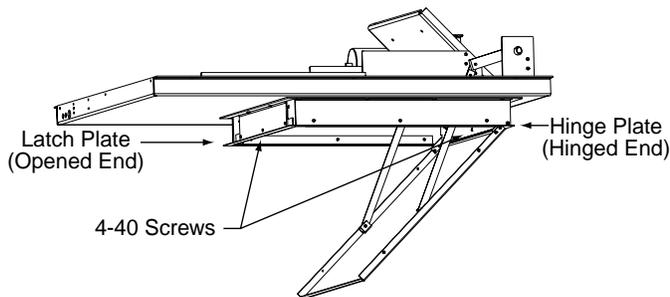


Figure 2

- ⑥ Install latch plate to opened end of door trim using three 4-40 button head cap screws provided.

- ⑦ Install hinge plate to hinged end of door trim using three 4-40 button head cap screws provided.
- ⑧ With the glass on top, slide shield into place, allowing lifting arms to slide between slots in shield (see Fig. 3).

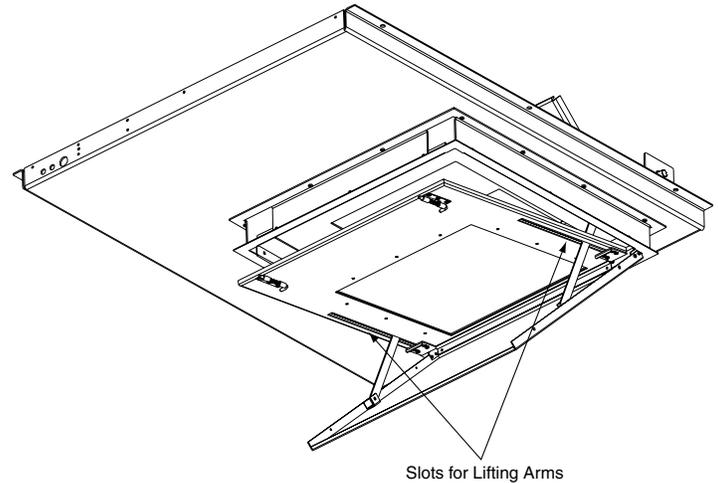


Figure 3

- ⑨ Reattach brackets by placing them over the screws and sliding them toward you. Do not tighten screws to brackets at this time.
- ⑩ Slide shield into place by holding shield flat against bottom of main pan of the Revelation, so that latches are engaged into holes in the latch plate, and holes in hinge of the shield are aligned with holes in hinge plate. Attach shield to hinge plate using two 8-32 screws provided (see Fig. 4).

Please Note: Be sure that hinge plate is adjusted so that insulating foam fits snugly against bottom of main pan of Revelation.

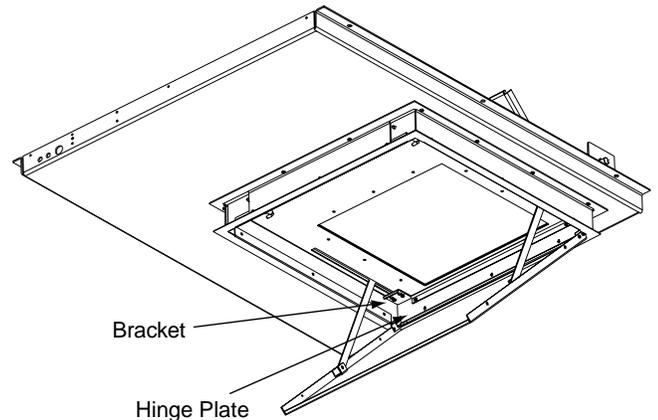


Figure 4

- ⑪ Tighten four screws in the brackets.
 - ⑫ Using the latches, open and close the shield several times to ensure proper assembly of the shield.
 - ⑬ Reattach power to the Revelation.
- Caution:** If any adjustments to the shield or door of the Revelation need to be made at any time, power should be disconnected before adjustments are made.
- ⑭ With shield in the up position, cycle the door of the Revelation a few times while checking for any interference. If interference does occur, please refer to step 11 before attempting to clear the interference.

DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999 ■ fax 765-987-7142

e-mail draper@draperinc.com ■ www.draperinc.com

Copyright © 2004 Draper Inc.

Form RevelationGlassShield_Inst04

Printed in U.S.A.