


Salara



**Motor-in-Roller
Electric Screen**

by **DRAPER**

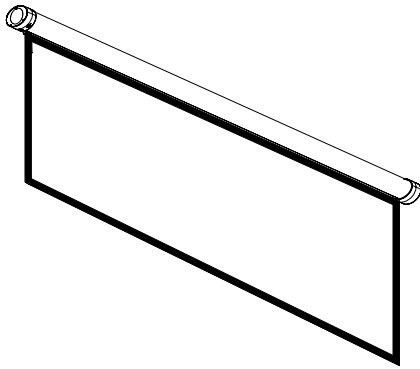

Please Check All Appropriate Selections

Select Viewing Surface:

- Matt White XT1000E(1.0 gain): GREENGUARD Gold certified
- Argent White XH1500E (1.5 gain)
- Contrast Grey XH800E (0.8 gain): GREENGUARD Gold certified
- Other: _____

Select Wiring/Control Options:

- Salara/Plug & Play™ IR**—10' (3m) cord, built-in IR receiver, handheld IR remote
- Salara/HW with Built-in IR**—with hand-held infrared remote transmitter
- Salara/HW**—This version of the Salara comes with one 110V-120V AC 3-position wall switch (silver wall plate with black rocker)
 - ____ Total number of 110-120V AC switches (switches operate independently)
 - Substitute white switch(es) for silver wall plate with black rocker
 - Optional Low Voltage Control Module (LVC-IV)
 - 24 Volt 3-Button Switch Number of 24V switches: _____
 - Radio Frequency Remote Control (only with 24v)
 - Infrared Remote Control (only with 24v)
 - Optional Key Operated Switch
 - Power Supply Key Switch (On-off)
 - 3-Position Key Control
 - 3-Position Switch with Hinged Key-Locking Coverplate
 - Optional Video Interface Control
 - VIC-115 Override Switch
 - VIC-12 Override Switch
 - VIC-6 Override Switch


(VICs are compatible only with the Override Switch, and not with any other wall switches or controls)

Select Border/Drop Options:

- Black Masking Borders (Standard on NTSC, HDTV & 16:10 sizes)
- Extra Screen Drop (Total screen height cannot exceed 9')
 - Same color as viewing surface (standard on AV format screens)
 - Black (standard on all other formats)

Length of total drop (including standard 12" on some sizes—see grid at right) ¹

Salara—Method of Installation

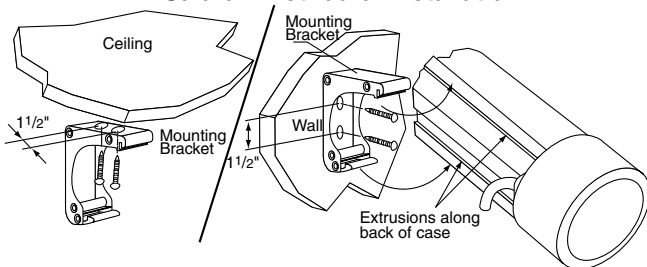

Specifications—Salara

_____ projection screens, size _____ h. x _____ w., wall/ceiling mounting. Elliptical case of extruded aluminum, with painted white finish. Injection molded plastic end-caps with domed contour shape, finished to match case. Case shall accept adjustable mounting brackets that snap easily into place and slide anywhere along length of case.

Electrically operated 110-120V AC, 60 hz. 3-wire motor mounted inside 1 3/4" (4.4 cm) diameter roller, instantly reversible, lifetime lubricated, with thermal overload protector and electric brake. Preset, accessible limit switches. Draws 1.1 amp.

Viewing surface to be flame and mildew resistant. Fabric attached to one-piece rigid steel roller. Bottom of viewing surface attached to 7/8" (2.2 cm) diameter roll formed steel dowel, finished white. Matt White XT1000E and Contrast Grey XH800E viewing surfaces are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg. Entire unit certified by Underwriters' Laboratories, Inc. for the United States and Canada. U.S. Patent Pending.

Wiring/Control Options:

Salara Plug & Play™ IR—Provided with built-in IR Eye, handheld IR remote control transmitter and 10' (3m) IEC cordset. No wiring necessary.

Salara/HW with Built-in IR—Provided with built-in IR Eye and handheld infrared remote transmitter.

Salara/HW—Provided with 3-position wall switch for 110-120V AC. Specifications subject to change without notice.

Dimensions & Data

AV Format	Nominal Diagonal	Image Area (H x W)	Overall Size (H x W)	Case Length	Net Wt. (lbs.)	Qty.
		50" x 50"		57 1/8"		23
		60" x 60"		67 1/8"		26
		70" x 70"		77 1/8"		30
		84" x 84"		91 1/8"		35
		72" x 96"		103 5/8"		38
		96" x 96"		103 5/8"		41
NTSC Video Format (4:3)						
	6'	42 1/2" x 56 1/2"	46 1/2" x 59 1/2"	67 1/8"		25
	7'	50" x 66 1/2"	53 1/2" x 69 1/2"	77 1/8"		29
	100"	60" x 80"	64" x 83 1/2"	91 1/8"		34
	10'	69" x 92"	73" x 96"	103 5/8"		38
HDTV Format (16:9)						
	65" ¹	31 3/4" x 56 1/2"	43 3/4" x 59 1/2"	67 1/8"		24
	73" ¹	36" x 64"	48" x 69 1/2"	77 1/8"		28
	82" ¹	40 1/2" x 72"	52 1/2" x 74"	81 5/8"		30
	92" ¹	45" x 80"	57" x 83 1/2"	91 1/8"		32
	100" ¹	49" x 87"	61" x 91"	98 5/8"		37
	106" ¹	52" x 92"	64" x 96"	103 5/8"		37
16:10 Format						
	67" ¹	35 1/4" x 56 1/2"	47 1/4" x 59 1/2"	67 1/8"		24
	76" ¹	40" x 64"	52" x 69 1/2"	77 1/8"		28
	85" ¹	45" x 72"	57" x 74"	81 5/8"		30
	94" ¹	50" x 80"	62" x 83 1/2"	91 1/8"		32
	109" ¹	57 1/2" x 92"	69 1/2" x 96"	103 5/8"		37

Custom Size

¹ These sizes include 12" black drop as standard. Also available in 1.85:1, 2.35:1 and 15:9 Formats. Contact Draper.

PROJECT: _____

ARCHITECT: _____


CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____


DRAPER

Salara—Dimensions

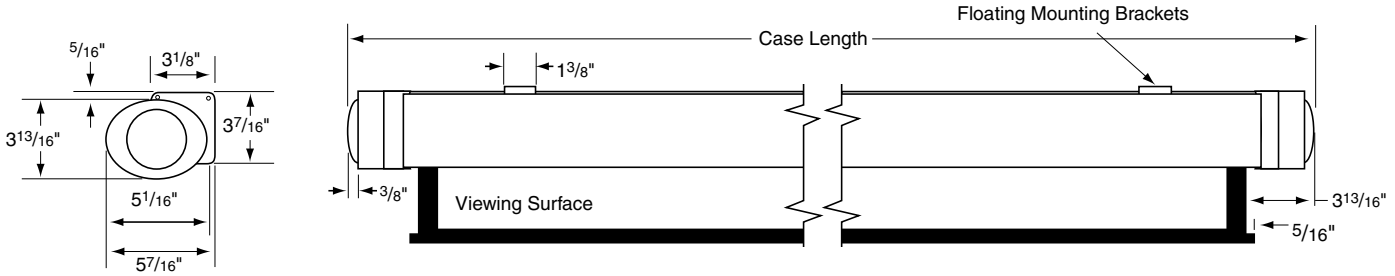


Wiring Diagrams


Salara

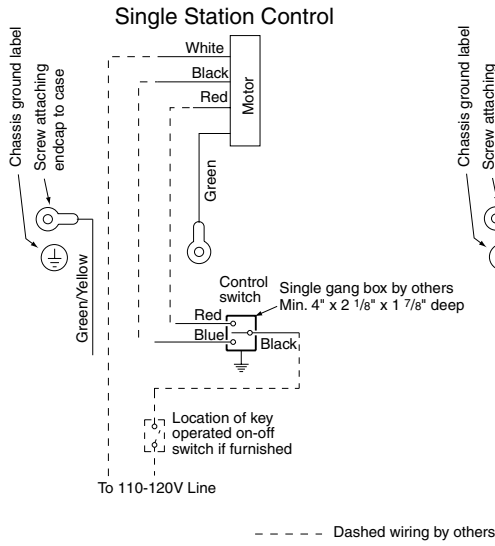


Multiple Station Control

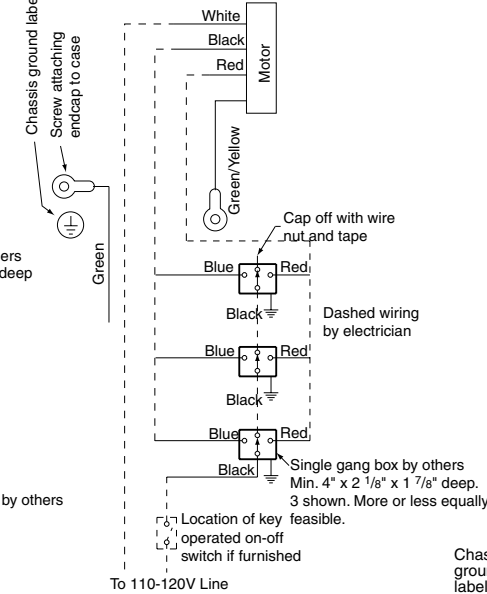



Hardwired with Built-in IR

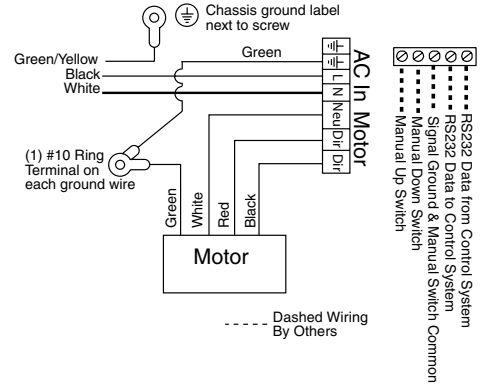

Plug & Play™ IR Standard 110-120V AC IEC (no external wiring necessary)

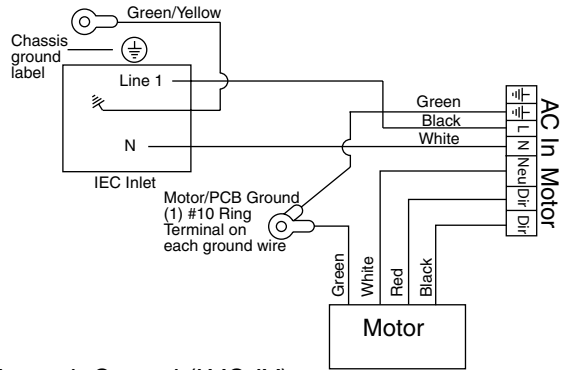

Low Voltage, IR Remote, RF Remote, Serial or Network Control (LVC-IV)

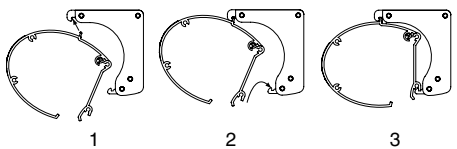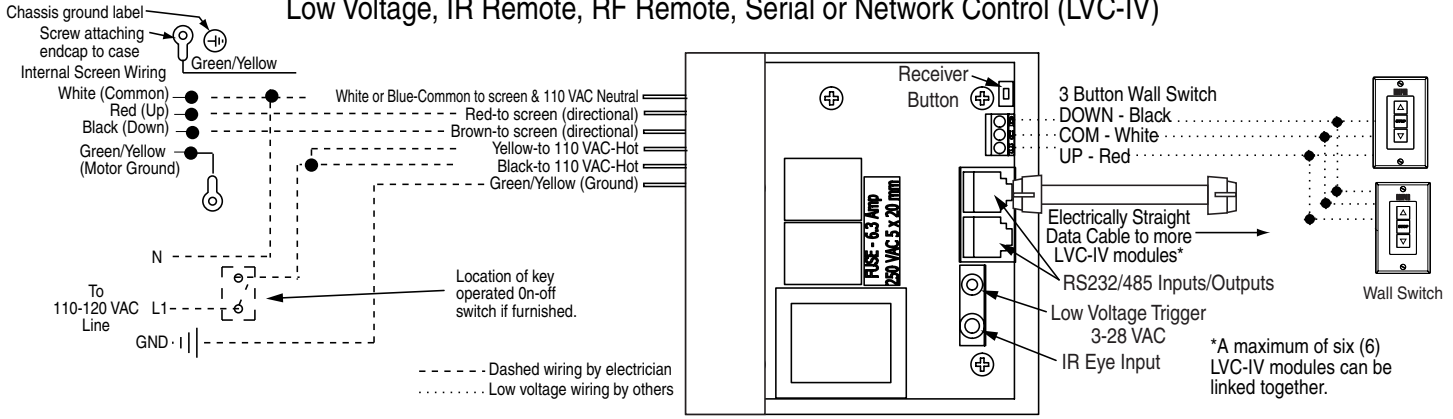

PROJECT: _____
 SUPPLIER: _____
 DATE: _____ REVISED: _____