

# OPTIVIEW MATT WHITE XT1000E

## SELF-SUPPORTING SCREEN SURFACE

### EXTRA WIDE VIEWING CONE / TYPICAL CONTRAST / ON-AXIS GAIN OF 1.0

The standard to which all other screen surfaces are compared. Preferred viewing surface in educational and commercial markets. A matt white surface diffuses projected light in all directions, so the image can be seen from any angle. Offers accurate color rendition, and superior clarity due to its smooth, non-embossed surface. Requires adequate provision for the control of ambient light in the audience area. Unity gain with a panoramic 180° cone. This surface is GREENGUARD Gold certified.

### SURFACE CHARACTERISTICS

- Maximum Height Without Seams: 120"
- Weight (g/sm): 120"=450, 120/121"= 550, >121"=736
- Thickness (mm): 0.38, 0.46, 0.59
- Cleaning: Mild soap and water
- Flame Retardant Standard: NFPA-701
- Composition: Fiberglass base laminated with PVC<sup>1</sup>

### REFLECTIVE PERFORMANCE<sup>2</sup>



- Gain Chart—See below
- 0° Gain: 1.0
- Half Gain Angle: Material does not reach half gain.

<sup>1</sup>Composition may differ slightly for some screen sizes/models.

<sup>2</sup>Individual test results may vary. Results based on a representative sample in Draper inventory.

### OptiView Family of Surfaces

OptiView surfaces are self-supporting and do not require tensioning to lay flat. These front projection surfaces are generally installed on operable roller screens with a dowel. Most surfaces in this group have a tearproof fiberglass base textile. OptiView surfaces are extremely sturdy and suitable for use in a variety of settings. All are 4K ready.

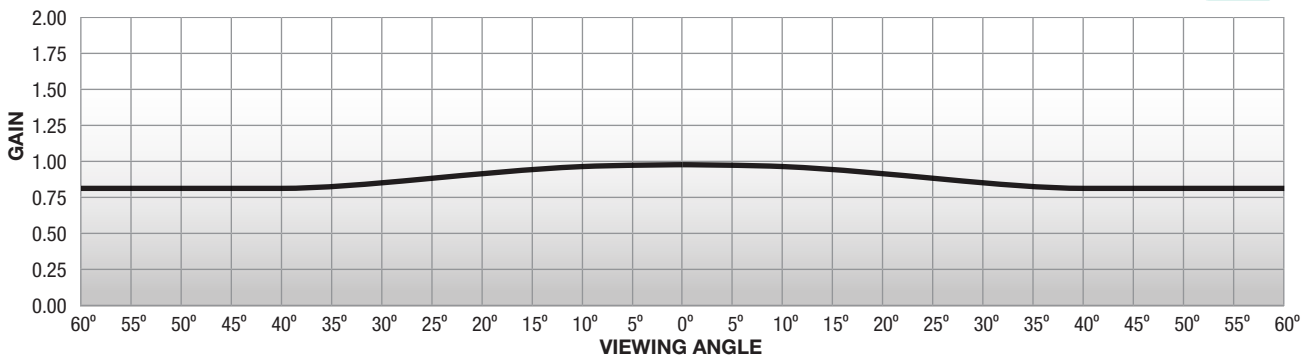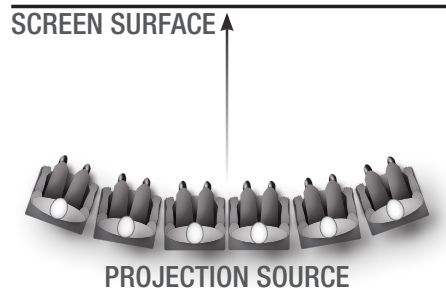

**GAIN CHART: 0° GAIN: 1.0, VIEWING CONE: 180° OPTIVIEW MATT WHITE XT1000E**