

Premier

Electrically operated projection screen with motor-in-roller

SUBMITTAL TECHNICAL INFO

Please check all appropriate selections and attach room schedule with verified dimensions.

Specifications

QUANTITY: _____ **SIZE:** _____ h. x _____ w.

Projection screens, electrically operated 110-120V AC, 60 Hz. 3-wire motor mounted inside screen roller, 1.1 amp draw, instantly reversible, lifetime lubricated, with internal thermal overload protector and electric brake, with factory set limits. 3" (76mm) dia. metal roller, mounted on rubber insulated supports.

Viewing surface mildew resistant, with black masking borders. Each side of surface includes tab guide cable system to maintain even lateral tension and hold surface flat. Tabs are integrated into the cut of the screen material then electronically welded. Bottom of surface supported and masked by black, extruded aluminum dowel weighted to apply proper vertical tension. Top of surface masked by 12" (30cm) black drop. Matt White XT1000V and Grey XH600V viewing surfaces are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage.

Case is one piece 22 ga. steel with flat back design and baked-on black plastisol finish, 5 7/8" H x 5 1/4" D (15cm H x 13cm D), including endcaps with universal mounting brackets. Endcaps of 12 ga. black epoxy powder coat finish steel fully enclosing roller ends and forming universal (wall or suspended) hanging brackets. 3-position control switch to stop or reverse screen at any point. Switch complete with cover plate.

Optional white aluminum Ceiling Opening Trim Kit available to trim opening when screen is to be recessed above the ceiling.

Entire unit certified by Underwriters' Laboratories, Inc. for the U.S. and Canada. Plenum rated case (UL approved "Suitable for Use in Environmental Air Space"). For more information, visit ul.com/gg.

DOWNLOADABLE 3-PART SPECIFICATIONS: available at www.draperinc.com

Please note: Dimensions of rollers, operators, and hardware at manufacturer's discretion.



Select Case Color

- Black (standard)
- White (optional)

Optional Accessories

- Additional Drop: _____
(Beyond standard 12" (30cm)¹)
- Total Drop: _____
(Standard 12" (30cm) + additional drop)
 - Black (standard)
 - Same color as viewing surface
(Total screen height cannot exceed 12' (3.7m); extra drop increases length of case)
- Optional Ceiling Opening Trim Kit for Recessed Installations²
- Optional Floating Mounting Brackets (for wall and ceiling)

¹ Extra drop will increase case length. Specify at time of order and request dimension. Contact Draper if this dimension is critical. Extra drop also increases length of dowel. Dowel clearance for recessed mounting equals dowel length plus 1" (25mm).

² Draper recommends 12" (30cm) of extra drop when ordering Ceiling Opening Trim Kit. The Ceiling Opening Trim Kit is for use in an acoustical, drop ceiling only. Not recommended for drywall or hard ceilings. Available on case lengths up to 174" (4.4m).

Select Viewing Surface:

OptiFlex (Tensioned Screen Surface)

- Black Backed Matt White XT1000VB
(1.0 gain) (GREENGUARD Gold Certified)
- Grey XH600V
(0.6 gain) (GREENGUARD Gold Certified)
- Pure White XT1300V
(1.3 gain)

CineFlex (Rear Projection Tensioned Surface)

- CineFlex CH1200
(1.2 gain)
- CineFlex White XT700V
(0.7 gain)
- Other: _____

ClearSound (Acoustically Transparent)

- ClearSound NanoPerf XT1000V
(1.0 gain)
- ClearSound Perf XT900V
(1.0 gain)
- Other: _____

TECVISION[®] Premium Optical Surface

- XH700X Grey (0.7 gain) Certified
- XH800X UST ALR (0.8 gain) Certified
- XH900X ALR (0.9 gain) Certified
- MS1000X ALR (1.7 gain) Certified
- CS1000X ALR (1.0 gain) Certified
- CS1200X ALR (1.2 gain) Certified
- XT1000X White (1.0 gain) Certified
- XT1100X White (1.1 gain) Certified
- XT1300X White (1.3 gain) Certified
- XT1600X White (1.6 gain) Certified
- XT1800X White (1.8 gain) Certified
- XH700X Grey NanoPerf (0.7 gain) Certified
- XH900X ALR NanoPerf (0.9 gain) Certified
- MS1000X ALR NanoPerf (1.0 gain) Certified
- XT1000X White NanoPerf (1.0 gain) Certified
- XT1100X White NanoPerf (1.1 gain) Certified
- XT1300X White NanoPerf (1.3 gain) Certified
- XT1600X White NanoPerf (1.6 gain) Certified
- XT1800X White NanoPerf (1.8 gain) Certified
- CS1000X ALR NanoPerf (1.0 gain) Certified
- CS1200X ALR NanoPerf (1.2 gain) Certified



PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ **REVISED:** _____

Select Motors and Controls:

Dimensions & Data

Standard Voltage Motor and Control Options:

- 110-120V AC (standard)
- Optional Quiet Motor¹

Please Note: These motors come with one 110V-120V AC 3-position wall switch (silver wall plate with black rocker).

- Substitute white switch(es) for silver wall plate with black rocker
- Optional Key Operated Switch
 - Power Supply Key Switch (on-off)
 - 3-Position Key Control
 - 3-Position Switch with Hinged Key-Locking Coverplate

Low-Voltage Motor and Control Options:

- Built-in LVC-IV (will increase case length by 1³/₁₆" (46mm))
- External LVC-IV
- Motor with internal low-voltage controller
- Quiet motor with internal low-voltage control²

Please Note: Select Control Options for Low-Voltage from below.


- 24 Volt 3-Button Switch Number of 24V switches: _____
- Radio Frequency Remote Control (only with 24V)
- Infrared Remote Control (only with 24V)
- Optional Key Operated Switch
 - Power Supply Key Switch (on-off)
 - 3-Position Switch with Hinged Key-Locking Coverplate

1 Quiet Motor Size Limitations			
AV	NTSC	HDTV	16:10
96" x 120"	150"	133"	137"

2 Quiet Motor w/ Internal LVC Size Limitations			
AV	NTSC	HDTV	16:10
84" x 84"	100"	110"	113"


NOMINAL DIAGONAL	IMAGE AREA HxW	CASE LENGTH (INCHES)	DOWEL LENGTH	NET WT. (LBS.)	QTY
16:10 Format					
67"	35 ¹ / ₄ " x 56 ¹ / ₂ "	72 ¹ / ₂ "	66 ³ / ₈ "	34	
76"	40" x 64"	81"	74 ⁷ / ₈ "	36	
85"	45" x 72"	89"	82 ⁷ / ₈ "	38	
94"	50" x 80"	97"	90 ⁷ / ₈ "	50	
109"	57 ¹ / ₂ " x 92"	110"	103 ⁷ / ₈ "	58	
113"	60" x 96"	113 ⁷ / ₈ "	107 ³ / ₄ "	60	
123"	65" x 104"	122"	115 ⁷ / ₈ "	65	
137"	72 ¹ / ₂ " x 116"	135"	128 ⁷ / ₈ "	75	
165"	87 ¹ / ₂ " x 140"	160 ¹ / ₂ "	154 ³ / ₈ "	80	
189"	100" x 160"	180 ¹ / ₂ "	174 ³ / ₈ "	94	
HDTV Format (16:9)					
65"	31 ³ / ₄ " x 56 ¹ / ₂ "	72 ¹ / ₂ "	66 ³ / ₈ "	34	
73"	36" x 64"	80"	73 ⁷ / ₈ "	36	
82"	40 ¹ / ₂ " x 72"	89"	82 ⁷ / ₈ "	38	
92"	45" x 80"	97 ¹ / ₂ "	90 ⁷ / ₈ "	50	
100"	49" x 87"	104"	97 ⁷ / ₈ "	57	
106"	52" x 92"	110"	102 ⁷ / ₈ "	58	
110"	54" x 96"	114"	107 ⁷ / ₈ "	60	
119"	58" x 104"	122"	115 ⁷ / ₈ "	65	
133"	65" x 116"	135"	127 ⁷ / ₈ "	75	
161"	79" x 140"	160 ¹ / ₄ "	152 ⁷ / ₈ "	80	
184"	90" x 160"	180 ³ / ₄ "	174 ³ / ₈ "	94	
NTSC Video Format (4:3)					
6'	42 ¹ / ₂ " x 56 ¹ / ₂ "	74"	67 ³ / ₈ "	35	
7'	50" x 66 ¹ / ₂ "	84 ¹ / ₄ "	77 ³ / ₈ "	40	
100"	60" x 80"	97 ³ / ₄ "	91 ¹ / ₈ "	50	
10'	72" x 96"	115"	108 ³ / ₄ "	55	
11'	78" x 104"	124 ¹ / ₄ "	116 ⁷ / ₈ "	65	
150"	87" x 116"	136 ¹ / ₄ "	130 ³ / ₈ "	78	
15'	108" x 144"	165 ³ / ₄ "	158 ³ / ₄ "	90	
200"	118" x 158"	180 ³ / ₄ "	174 ³ / ₈ "	95	
SIZE H X W (INCHES)	SIZE H X W (CM)	CASE LENGTH (INCHES)	CASE LENGTH (CM)	NET WT. (LBS.)	QTY
AV Format					
50" x 50"		68"	60 ⁷ / ₈ "	30	
60" x 60"		78 ³ / ₄ "	71 ⁷ / ₈ "	35	
70" x 70"		89"	82 ⁷ / ₈ "	40	
84" x 84"		104 ¹ / ₄ "	96 ⁷ / ₈ "	50	
72" x 96"		115"	108 ⁷ / ₈ "	55	
96" x 96"		117 ³ / ₄ "	110 ³ / ₈ "	60	
7' x 9'		128 ¹ / ₄ "	120 ⁷ / ₈ "	70	
9' x 9'		129 ³ / ₄ "	122 ⁷ / ₈ "	75	
8' x 10'		141 ³ / ₄ "	134 ³ / ₈ "	80	
10' x 10'		143 ¹ / ₂ "	136 ⁵ / ₈ "	85	
9' x 12'		165 ³ / ₄ "	158 ⁷ / ₈ "	90	
12' x 12'		171 ¹ / ₂ "	162 ³ / ₈ "	100	
Custom Size					

Methods of Installation

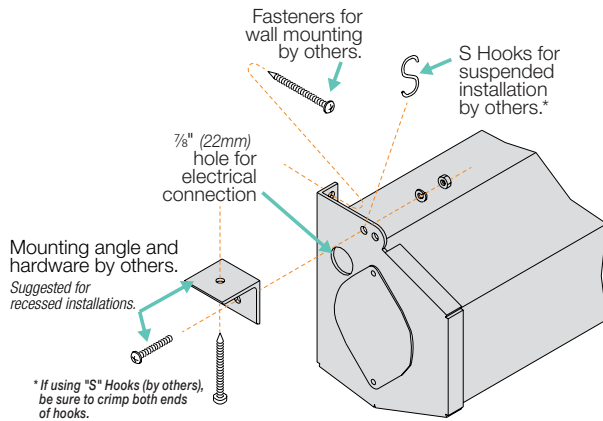


Please Note: If using "S" Hooks, for added safety, crimp both ends of the "S" hooks so the screen cannot come off.


Optional Ceiling Opening Trim Kit

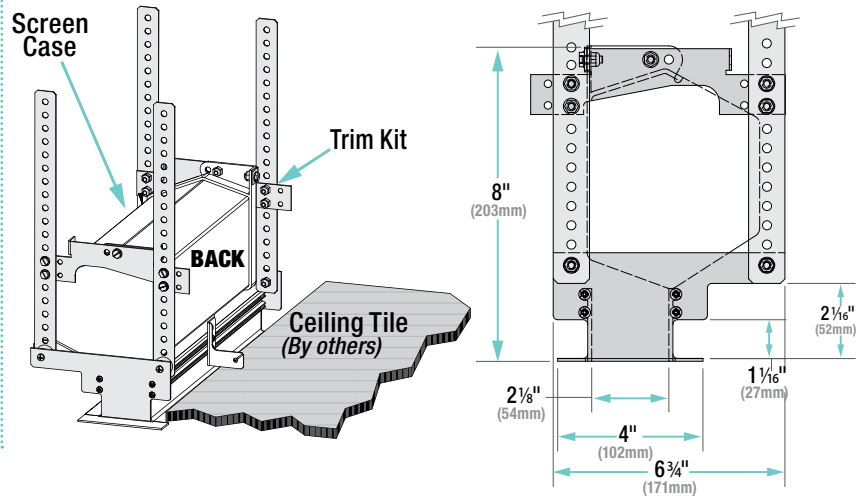

Types of Installation

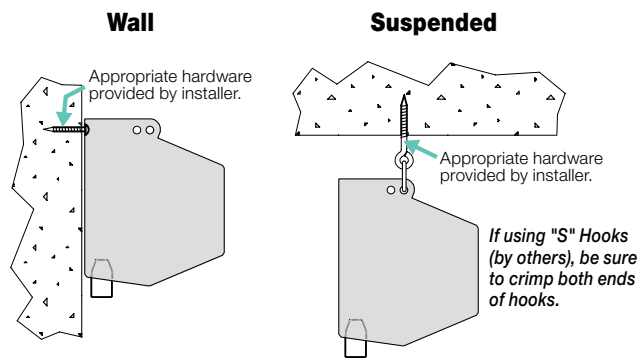


Optional Floating Mounting Bracket

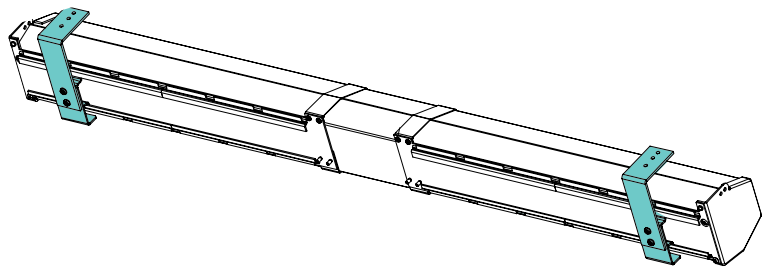


Case Dimensions

PLEASE NOTE: Internal LVC-IV will increase overall case length by 1 13/16" (46mm).

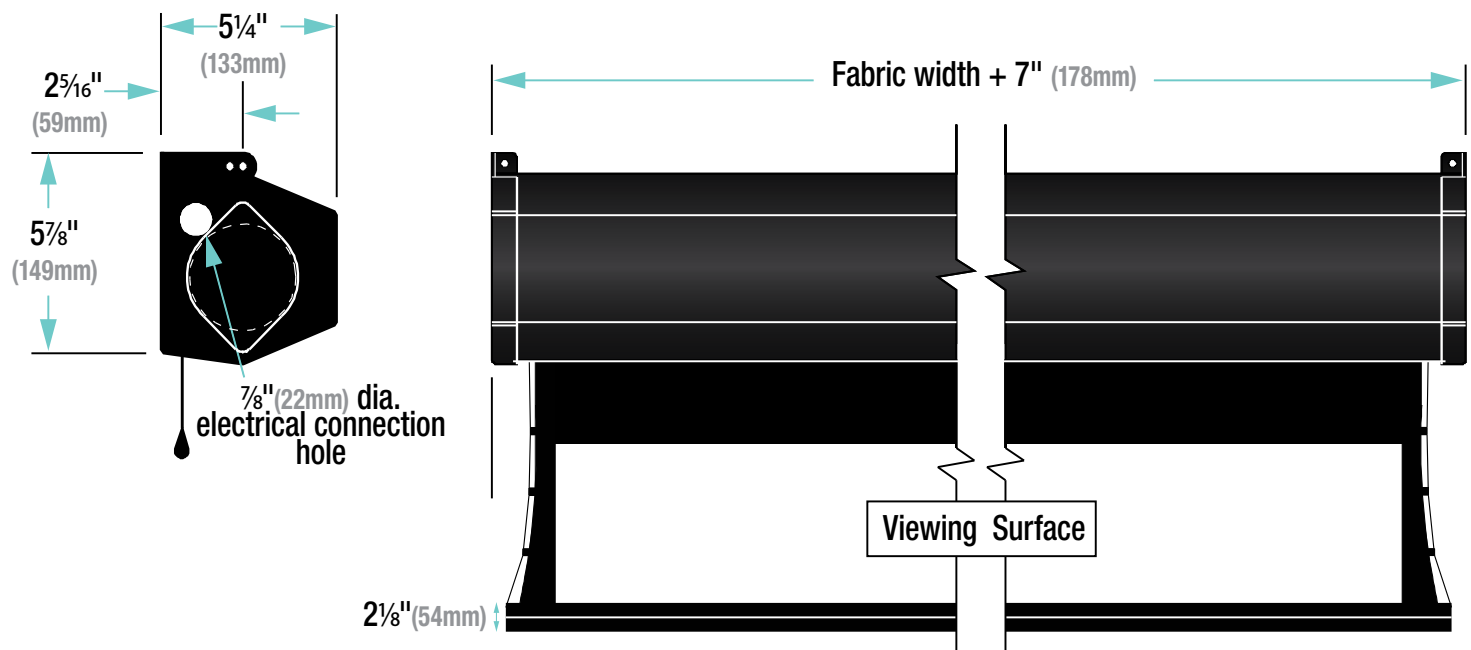


110-120V Motor and Quiet Motor Single Station Control

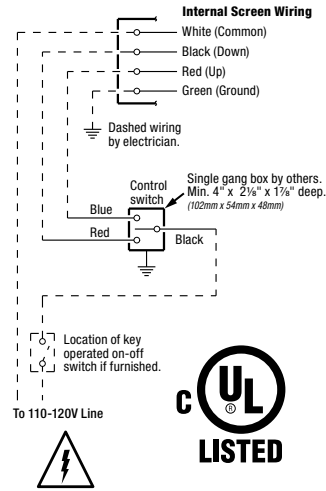

Please Note: For external low-voltage (LVC-IV), serial (LVC-IV), and network (LVC-IV) wiring diagrams, please consult instructions for those modules.

110-120V Motor and Quiet Motor (Motors with Internal Low-Voltage Controller)

Single Station Control

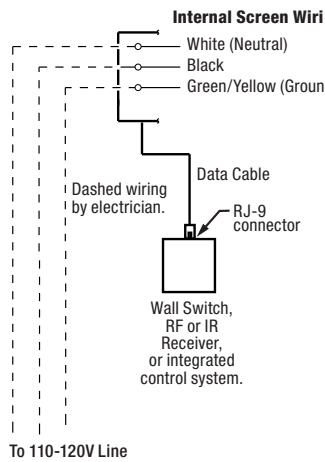

Multiple Station Control

