


**Overview**

The IntelliFlex I/O 3-Command Dual Zone wall switch is a smart user input device that can control a single shade or group of shades.

**Features**


- Two independent control zones
- Control any number of motors in an IntelliFlex I/O network.
- Can be used with any number of intermediate stops, or no stops at all.
- Integrated LEDs provide system status to users.
- Standard Decora size and fits into any standard single gang box.

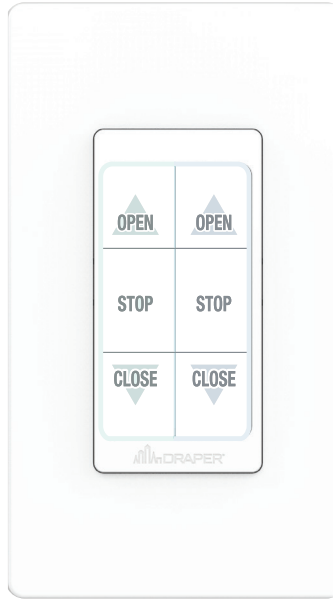

**Technical Specifications - 3 Command Dual Wired Wall Switch**

Input Power:	24V DC
Material:	ABS plastic
Operating Temp:	Ambient
Dimensions:	4 1/8" x 1 3/4" x 7/8"      105 x 45 x 22mm
Mounting:	Single Gang
Shipping Weight:	2lb.                              0.9 kg
	Indoor Use Only
	NDC Required (included)

**IntelliFlex I/O** the complete control solution for Motorized FlexShades®

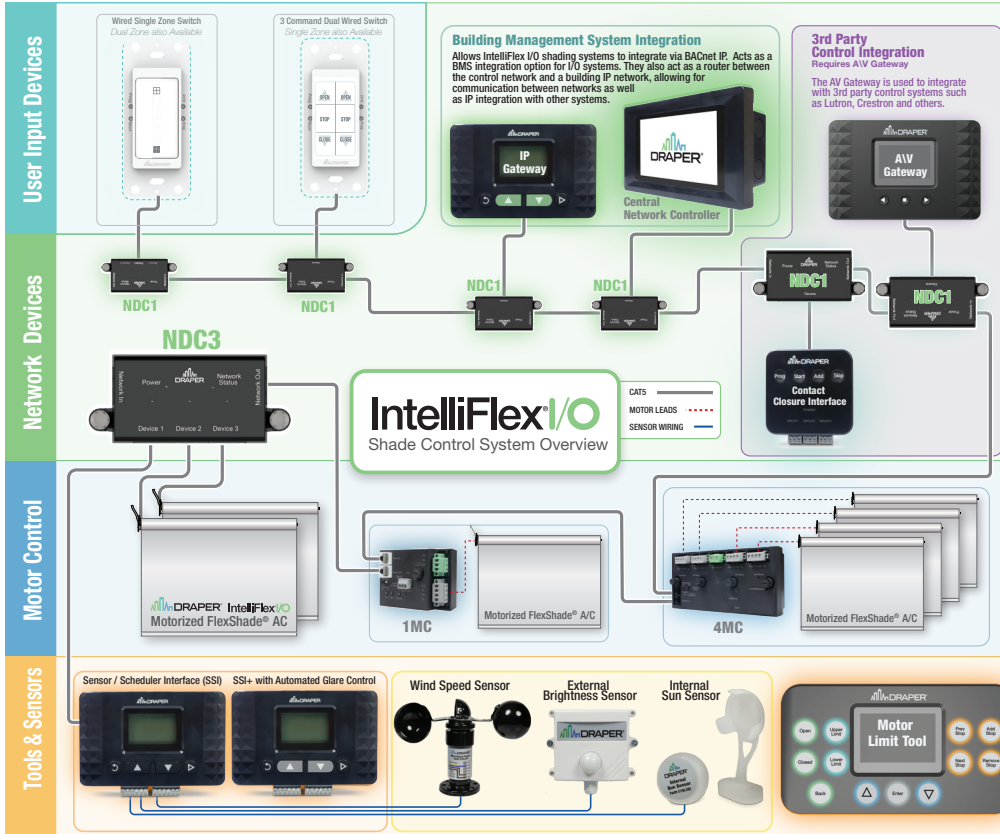

**IntelliFlex I/O Compatible Components**

	Part Number
<b>User Input Devices</b>	
Single Zone Wired Wall Switch (S1)	C112.161
Dual Zone Wired Wall Switch (S2)	C112.162
3 Command Single Wired Wall Switch	C112.178
3 Command Dual Wired Wall Switch	C112.179
<b>Network Devices</b>	
Network Device Connector (NDC1)	C156.322
3-Port Network Device Connector (NDC3)	C156.311
Wireless Network Gateway (WNG)	C156.268
AV Gateway (AVG)	C156.269
Sensor/Scheduler Interface (SSI)	C156.272
SSI with Automated glare control (SSI+)	C156.304
Contact Closure Interface (CCI)	C156.273
Central Network Controller (CNC)	C156.271
IP Gateway (IPG)	C156.305
<b>Motor Control</b>	
1 Motor Controller w/enclosure (1MC)	C156.285SA
1 Motor Controller (1MC)	C156.285
4 Motor Controller w/enclosure (4MC)	C156.286SA
<b>Tools</b>	
Motor Limit Tool (MLT)	C202.060
IntelliFlex I/O Installation Kit (IO-Kit)	C504.206SA

For low voltage wiring requirements, Draper recommends consulting with a professional low voltage electrical contractor.

**All low voltage wiring must be run separately from line voltage wiring.**