

Overview

The 3-Port Network Device Connector (NDC3) is used to connect up to 3 IntelliFlex I/O devices into a network, distributing both communication and power to each device. LEDs provide feedback that can be used to help troubleshoot network wiring issues.

Features

- Each device port is isolated to reduce the effect of wiring issues
- Network LED indicates the number of devices on the network
- Device port LEDs show which ports are communicating
- Auto termination for the ends of the network

Technical Specifications -



Material:	ABS plastic
Operating Temp:	Ambient
Dimensions:	3 3/8" x 1 15/16" x 1 9/16" 87 x 23 x 39mm
Mounting Hardware:	2 Self-Tapping Screws (#8-18x1 1/2" Zinc HWH TYPE AB)
Shipping Weight:	1 lb. 0.45 kg
Approved for use in plenum spaces	
Indoor Use Only	

INSTRUCTIONS
WIRING & INSTALLATION

! IMPORTANT INSTRUCTIONS !

When using your equipment, basic precautions should always be followed to reduce the risk of fire, electric shock and injury to persons, including the following:

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on the product.
3. Do not use this product near water, for example, near a bath tub, wash bowl, kitchen sink, or laundry tub, in a wet basement, or near a swimming pool.
4. Never push objects of any kind into this product through cabinet slots as they may touch dangerous voltages.
5. SAVE THESE INSTRUCTIONS

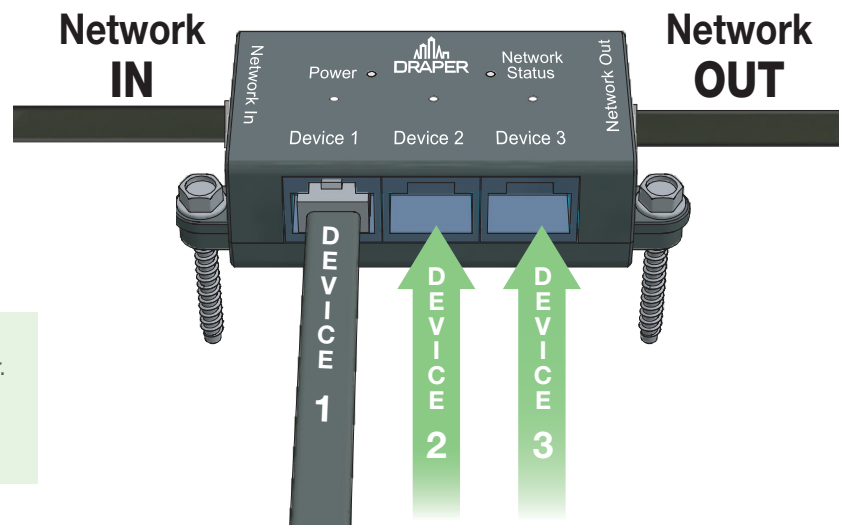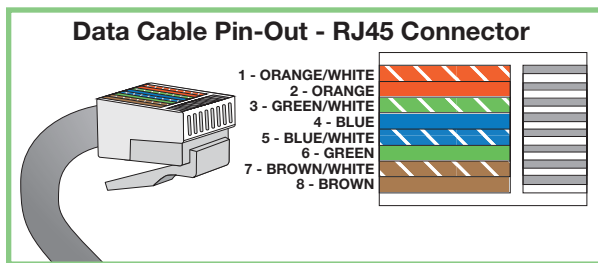

For low voltage wiring requirements, Draper recommends consulting with a professional low voltage electrical contractor.

All low voltage wiring must be run separately from line voltage wiring.