

Bottom-Up FlexShade® NEXD, Small and Large Hardware

Premium manually-operated bottom-up shade

SUBMITTAL TECHNICAL INFO

FLEXBOTTOMUP NEXD

Please check all appropriate selections and attach room schedule with verified dimensions.

Fabric Series: _____

Color Name / Number: _____

Openness Factor: _____

Please see [Shade Fabric Reference Guide](#) on the Draper® website for fabric colors and specifications.

Select Clutch Location: (As seen from *INSIDE* the room facing the window. Also indicate on room schedule.)

- Right (standard)
- Left

Select Clutch Color:

- White (standard)
- Black

Select Bead Chain Type:

- Steel Chain
 - Stainless Steel (standard)
 - Black Steel
 - White Steel
- Polyester Chain
 - Black
 - Bronze
 - White
 - Ivory
 - Grey

Select Hardware

Top Roller

- Endcaps Only
- Endcaps and Fascia
- Headbox: Surface Style Pocket Style


Bottom Roller

- Endcaps Only
- Fascia and Endcaps
- Pocket Headbox
 - Small
 - Large

Select Hardware Finish (Does not apply to Type "D" Headbox)

- Clear Anodized (standard)
- Ivory
- Black
- Bronze
- White
- Custom (Contact Draper)

Components

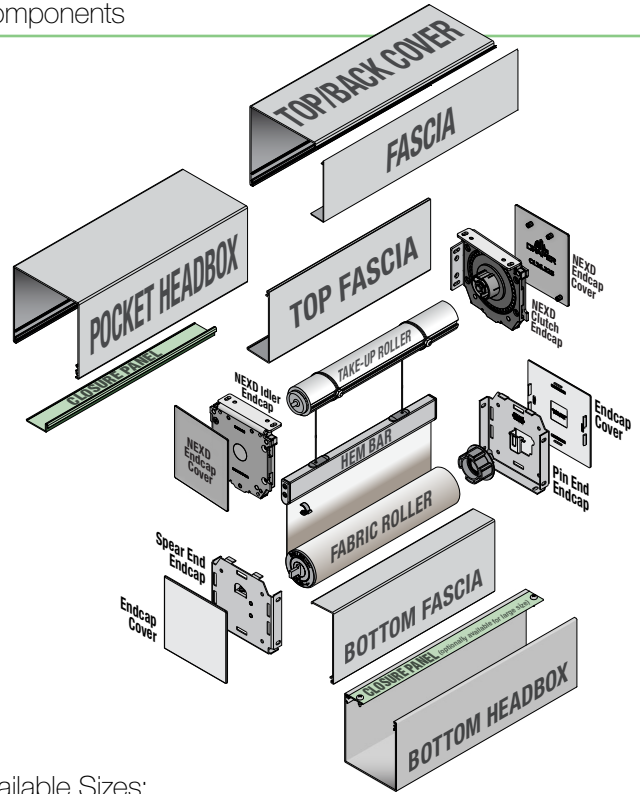

Available Sizes:

| WIDTH: | 2' | 3' | 4' | 5' | 6' | 7' | 8' | 9' | 10' | 11' | 12' | 13' | 14' | 15' |
|---------|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| HEIGHT: | | | | | | | | | | | | | | |
| 2' | | | | | | | | | | | | | | |
| 3' | | | | | | | | | | | | | | |
| 4' | | | | | | | | | | | | | | |
| 5' | | | | | | | | | | | | | | |
| 6' | | | | | | | | | | | | | | |
| 7' | | | | | | | | | | | | | | |
| 8' | | | | | | | | | | | | | | |
| 9' | | | | | | | | | | | | | | |
| 10' | | | | | | | | | | | | | | |
| 11' | | | | | | | | | | | | | | |
| 12' | | | | | | | | | | | | | | |
| 13' | | | | | | | | | | | | | | |
| 14' | | | | | | | | | | | | | | |
| 15' | | | | | | | | | | | | | | |

* Sizes requiring large endcaps/brackets will vary according to fabric.

- Default small
- Small endcaps/brackets and 1 1/8" (40mm) roller are recommended.
- Large endcaps/brackets and 3" (76mm) roller may be required.

Child Safety Information

To comply with Child Safety Standard ANSI/WCMA A100.1-2022, this product ships with a tensioning device attached to the bead chain. Incorrect installation partially disables the product. When properly fastened to mounting surface, the pre-installed Tensioned Hold Down device for clutch-operated units prevents creation of a hazardous loop by maintaining tension on the bead chain.

Scan for more information, including short videos on correctly installing the tensioning device, or go to draperinc.com/windowshades/childsafety.



Draper, Inc. | 411 S. Pearl St. Spiceland, IN 47385
draperinc.com | 765.987.7999 | 800.238.7999

© 2024 All Rights Reserved | FORM: Bottom-Up_FS_NEXD_Sub24

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____

Specifications

EQUIPMENT

NEXD CLUTCH OPERATOR: Delrin® POM thermoplastic with swaged .354" (9 mm) primary steel post with rotational bearing to ensure smooth and quiet operation. Overrunning design. Positive mechanical engagement of drive mechanism to tube. White (standard) or black color options. Stainless steel bead chain (standard). Ivory, grey, black, white, and brown polyester chain available.

ROLLERS: Extruded aluminum 2", 2.36", or 3.12" (51, 60, or 79mm) diameter roller tube as appropriate for shade.

COMPONENTS

ENDCAPS: 1018 steel stamping, two sizes available:

SMALL: 3 3/8" x 3 7/8" (86 x 98 mm), **LARGE:** 4 5/8" x 4 3/8" (117 x 117 mm)

Installs to face, ceiling, or jamb. Field convertible between wall left, wall right, or ceiling mount. Idler endcaps to have leveling adjustment.

ENDCAP COVERS: Plastic covers push into endcaps for positive engagement. Available in ivory, bronze, black, silver, or white to match fascia.

FABRIC ATTACHMENT: LSE adhesive fabric attachment.

FABRIC RETAINER: 1/4" (6 mm) OD .17" (4 mm) ID linear low-density polyethylene tubing, inside heat sealed hem.

HEM BAR: Machine extruded aluminum, finished to match fascia. Clear anodized (standard), black, white, ivory, or bronze powder coat finish available. Includes built-in pulley assemblies for lifting cables.

LIFTING CABLE: 0.046" (1 mm) OD 7x19 strand low-stretch, high fatigue nylon-coated cable.

FASCIA: L-shaped cover of 6063-T5 extruded aluminum. Fascia snaps into place using no exposed fasteners. Clear anodized finish (standard) or available in ivory, bronze, black, or white powder coat.

SURFACE HEADBOX: Consists of fascia, "L" shaped back/top cover. Endcaps slide into extrusion without exposed fasteners.

POCKET HEADBOX: For pocket installation, includes a "U" shaped back/top/front cover. Removable closure panel available for top installation (Small and Large sizes), and for bottom installation (Large size only).

Small Size: 3 7/8" x 3 1/8" (87mm x 98mm)

Large Size: 4 11/16" x 4 1/16" (119mm x 119mm)


SOME EXPOSED FASTENERS REQUIRED.

PATENT INFORMATION: Available at www.draperinc.com/legal/patents.

DOWNLOADABLE 3-PART SPECIFICATIONS: www.draperinc.com/documents.aspx. Entire unit certified by Underwriters' Laboratories, Inc. for the U.S. and Canada.

Please note: Dimensions of rollers, operators, and hardware at manufacturer's discretion.

Dimensions

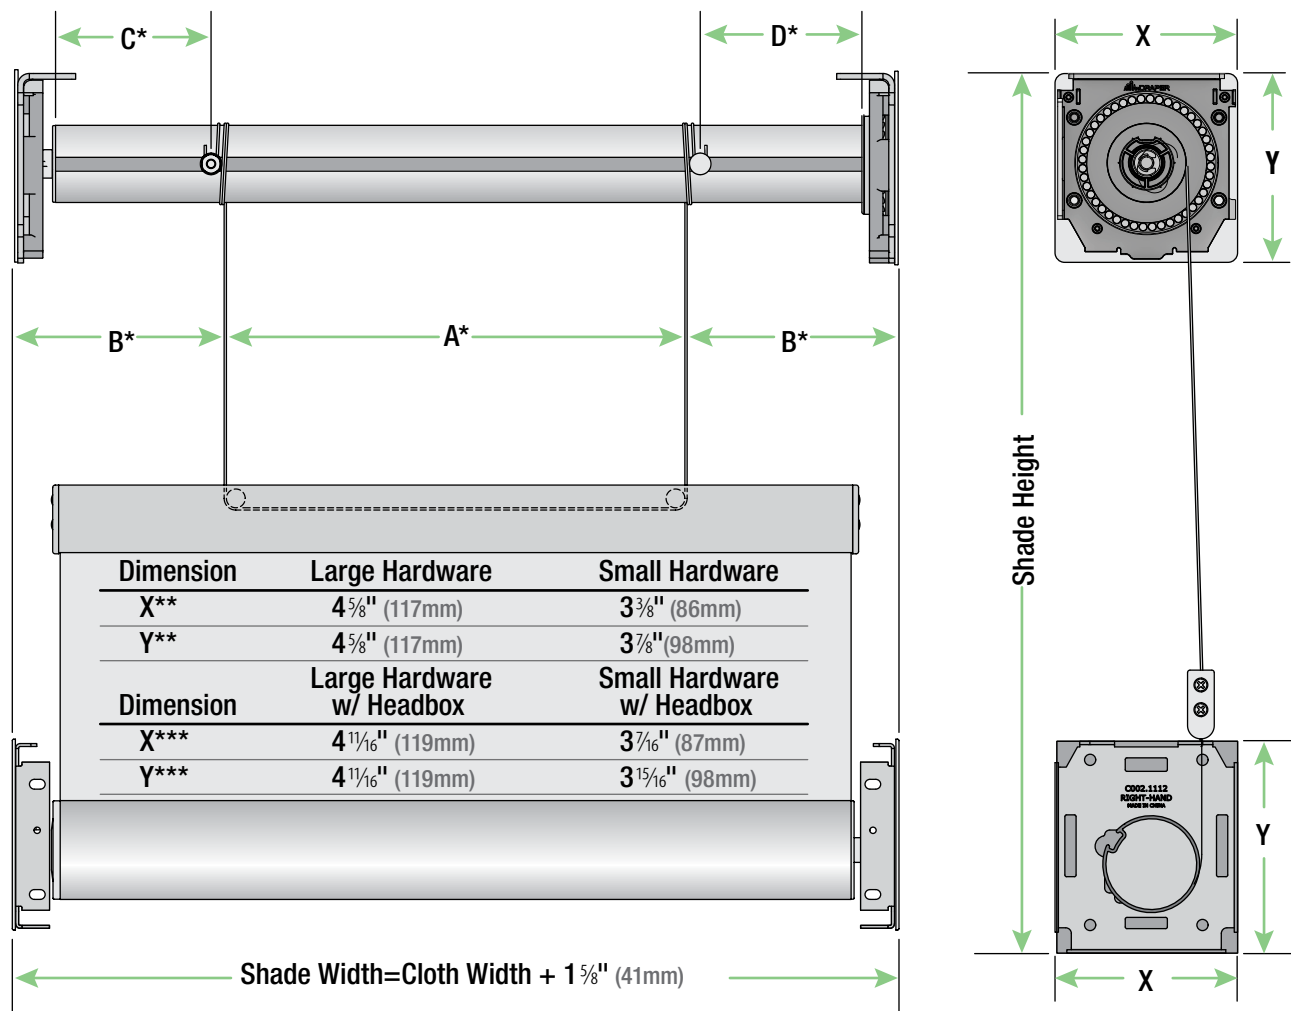

*These dimensions are different for each shade and are provided by Draper® with your order.
 Dimension "A" is a vertical cable spacing.
 Dimension "B" is the distance from the vertical cable spacing to the vertical edge of the shade.
 Dimension "C" is the distance from the Idler End of the tube to the center of the cable attachment stud.
 Dimension "D" is the distance from the Operator End of the tube the center of the cable attachment stud.

**These dimensions apply to Endcap Covers. Endcap or Fascia dimensions fall within this dimension.

***Shades with Headbox are 1/16" larger.