

Overview

The IntelliFlex I/O Wireless Network Gateway allows wireless devices to control shades on the wired network.

Features


- Required to use the handheld remote (Part#C156.270) in a wired network.
- LEDs indicate the status of both the wired and wireless networks
- Allows wireless control of the entire network from a single receiving point



Technical Specifications - Wireless Network Gateway

Material:	ABS plastic
Operating Temp:	Ambient
Dimensions:	3 3/8" x 2" x 1 1/16" 85 x 52 x 27mm
Mounting:	Mounting Hardware Provided
Shipping Weight:	1 lb. 0.45 kg
Approved for use in plenum spaces	
Indoor Use Only	

IntelliFlex I/O the complete control solution for Motorized FlexShades®

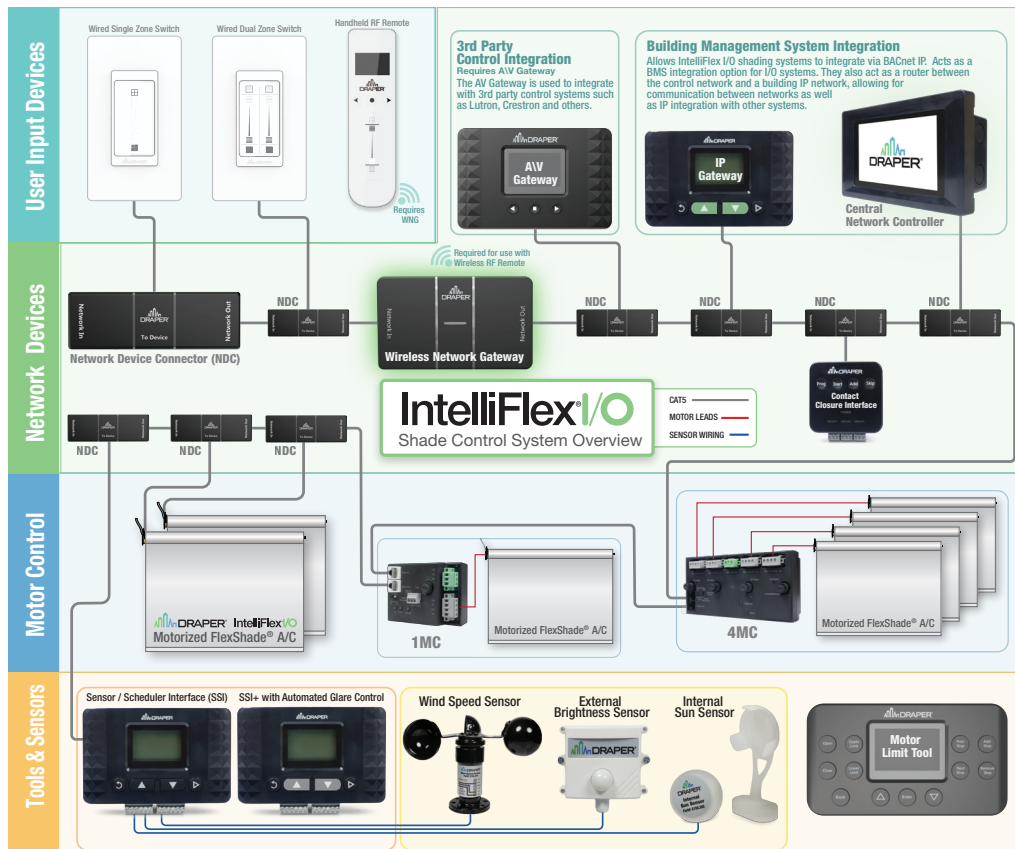

IntelliFlex I/O Compatible Components

	Part Number	
User Input Devices	Single Zone Wired Wall Switch (S1)	C112.161
	Dual Zone Wired Wall Switch (S2)	C112.162
	Handheld RF Remote (RFR)	C156.270
	IR Transmitter and Receiver (IRT/R)	121227
	IR Transmitter (IRT)	121228
Network Devices	Network Device Connector (NDC)	C156.267
	Wireless Network Gateway (WNG)	C156.268
	AV Gateway (AVG)	C156.269
	Sensor/Scheduler Interface (SSI)	C156.272
	SSI w/ Automated glare control (SSI+)	C156.304
	Contact Closure Interface (CCI)	C156.273
	Central Network Controller (CNC)	C156.271
Motor Control	IP Gateway (IPG)	C156.305
	3-Port Network Device Connector (NDC3)	C156.311
	1 Motor Controller w/enclosure (1MC)	C156.285SA
Tools	1 Motor Controller (1MC)	C156.285
	4 Motor Controller w/enclosure (4MC)	C156.286SA
	Motor Limit Tool (MLT)	C202.047
	IntelliFlex I/O Installation Kit (IO-Kit)	C504.206SA

For info on other I/O compatible products, visit draperinc.com.

For low voltage wiring requirements, Draper recommends consulting with a professional low voltage electrical contractor. **All low voltage wiring must be run separately from line voltage wiring.**