

Overview

Simple to configure, the RFR provides control for up to 32 separate shade groups. Touch control allows shades to be positioned anywhere with one touch.

Features


- Simple configuration using the built-in touch controls and lcd display
- Touch control to position the shades anywhere with one touch
- Controls up to 32 channels.



Technical Specifications - Handheld RF Remote

Input Power:	AAA Batteries (2)	
Material:	ABS plastic	
Operating Temp:	Ambient	
Dimensions:	5 7/8" x 1 9/16" x 7/8" 150 x 40 x 22mm	
Range:	100ft	30.5M
Communication:	Bluetooth 2.4GHz	
Shipping Weight:	2lb.	0.9 kg
	Indoor Use Only	
	Requires WNG (C156.268)	

IntelliFlex I/O the complete control solution for Motorized FlexShades®

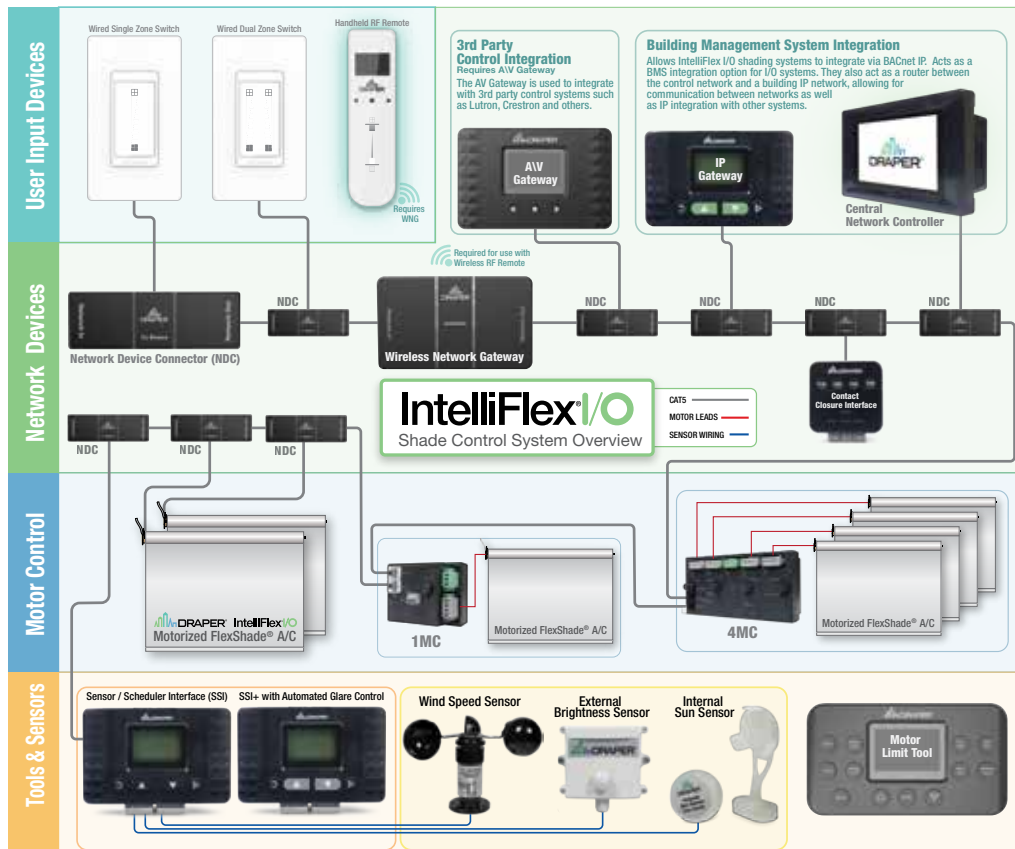

IntelliFlex I/O Compatible Components

Part Number

	Part Number
User Input Devices	Single Zone Wired Wall Switch (S1) C112.161
	Dual Zone Wired Wall Switch (S2) C112.162
	Handheld RF Remote (RFR) C156.270
	IR Transmitter and Receiver (IRT/R) 121227
	IR Transmitter (IRT) 121228
Network Devices	Network Device Connector (NDC) C156.267
	Wireless Network Gateway (WNG) C156.268
	AV Gateway (AVG) C156.269
	Sensor/Scheduler Interface (SSI) C156.272
	SSI w/ Automated glare control (SSI+) C156.304
	Contact Closure Interface (CCI) C156.273
	Central Network Controller (CNC) C156.271
	IP Gateway (IPG) C156.305
Motor Control	1 Motor Controller w/enclosure (1MC) C156.285SA
	1 Motor Controller (1MC) C156.285
	4 Motor Controller w/enclosure (4MC) C156.286SA
Tools	Motor Limit Tool (MLT) C202.030
	IntelliFlex I/O Installation Kit (IO-Kit) C504.206SA

For info on other I/O compatible products, visit draperinc.com.