

C156.273

Overview

The IntelliFlex I/O Contact Closure Interface allows up to 6 contact closure inputs to be connected to the network. These are grouped into 3 sets of Up/Down signals, each of which can control any number of shades on an IntelliFlex I/O network. Configuration is done using the onboard programming buttons, without rewiring or the use of external configuration devices. Power is provided through the IntelliFlex I/O network using a single ethernet cable for power and communication.

Features


- 3 independent groups of Up/Down contacts.
- Flexible control signal options, including full movements to motor limits, manual control to intermediate stops.



Technical Specifications - Contact Closure Interface

Material:	ABS plastic	
Operating Temp:	Ambient	
Dimensions:	3" x 3" x 1"	76 x 76 x 25mm
Mounting:	Mounting Hardware Provided	
Shipping Weight:	2 lb.	0.9 kg
	Indoor Use Only	
	NDC Required (included)	

IntelliFlex I/O the complete control solution for Motorized FlexShades®

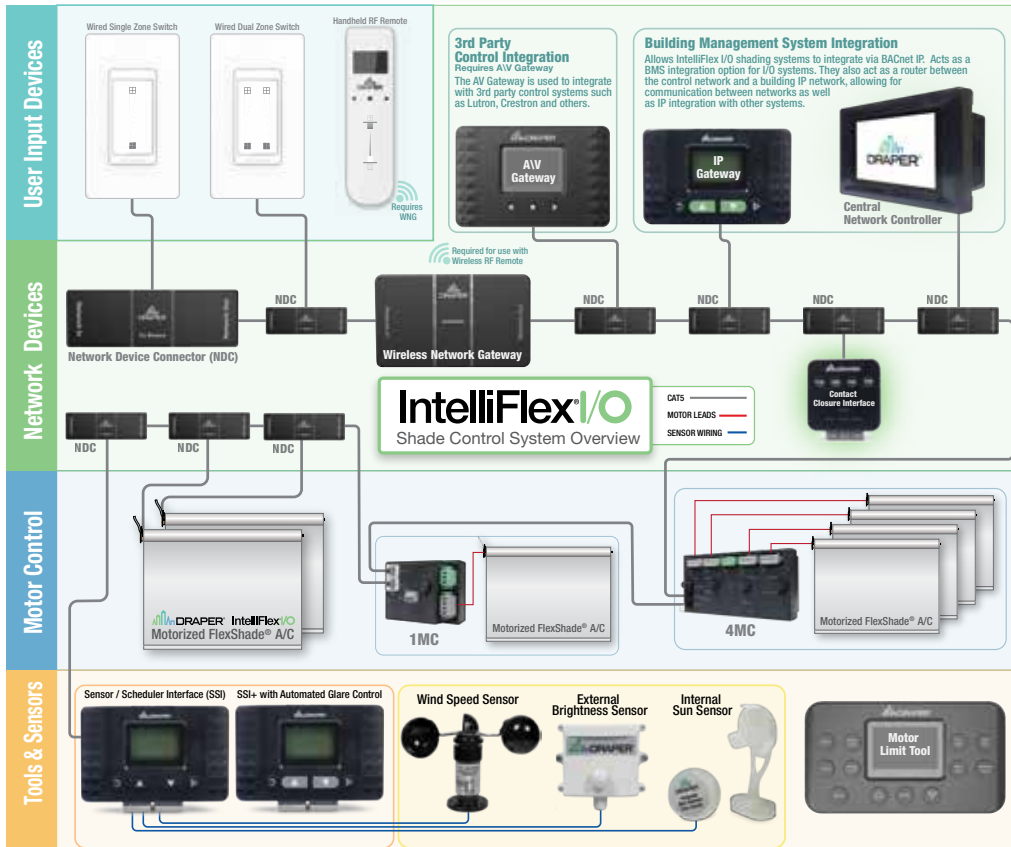

IntelliFlex I/O Compatible Components

Part Number

	Part Number
User Input Devices	
Single Zone Wired Wall Switch (S1)	C112.161
Dual Zone Wired Wall Switch (S2)	C112.162
Handheld RF Remote (RFR)	C156.270
IR Transmitter and Receiver (IRT/R)	121227
IR Transmitter (IRT)	121228
Network Devices	
Network Device Connector (NDC)	C156.267
Wireless Network Gateway (WNG)	C156.268
AV Gateway (AVG)	C156.269
Sensor/Scheduler Interface (SSI)	C156.272
SSI w/ Automated glare control (SSI+)	C156.304
Contact Closure Interface (CCI)	C156.273
Central Network Controller (CNC)	C156.271
IP Gateway (IPG)	C156.305
Motor Control	
1 Motor Controller w/enclosure (1MC)	C156.285SA
1 Motor Controller (1MC)	C156.285
4 Motor Controller w/enclosure (4MC)	C156.286SA
Tools	
Motor Limit Tool (MLT)	C202.030
IntelliFlex I/O Installation Kit (IO-Kit)	C504.206SA

For info on other I/O compatible products, visit draperinc.com.