

FlexStyle® Cassette Ascend

Cordless operated window shade with cassette-style case



SUBMITTAL TECHNICAL INFO

FSTYL CASS ASND

Please check all appropriate selections and attach room schedule with verified dimensions.

Fabric Series: _____

Color Name / Number: _____

Openness Factor: _____

Please see [Draper® Fabric Options](#) for fabric colors and specifications.

Select Hardware Finish

Fabric covered (open bottom ONLY)

- Yes No

Select Hardware Color


- Black White
 Taupe Warm White
 Grey Textured Bronze

Select Cassette Options

- Square
 Curved
Open Bottom
 Yes No

Select Control & Accessory Options

- Top Light Block Brush
 Pull-Down Wand
(Available in White only)
 36" 48" 60"

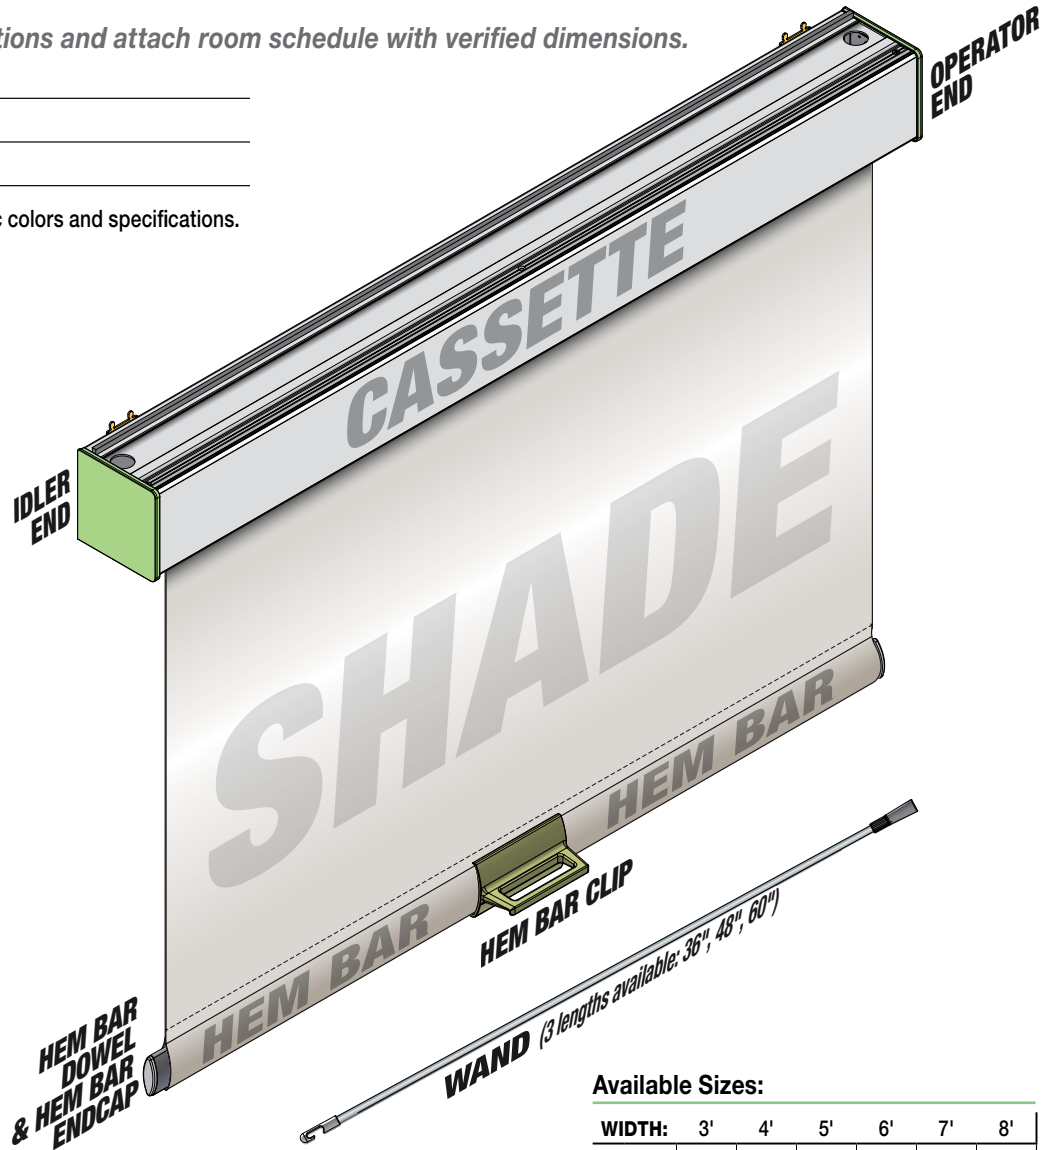

Available Sizes:

WIDTH:	3'	4'	5'	6'	7'	8'
HEIGHT						
2'						
3'						
4'						
5'						
6'						
7'						
8'						
9'						
10'						

* Sizes will vary according to fabric.

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____



Draper, Inc. | 411 S. Pearl St. Spiceland, IN 47385
draperinc.com | 765.987.7999 | 800.238.7999

© 2024 All Rights Reserved | FORM: FlexStyle_Cassette_Ascend_Sub24

Specifications

FLEXSTYLE CASSETTE ASCEND OPERATED SHADING SYSTEM:

Balanced spring operated, vertical roll-up, fabric shading system. Ships fully assembled, and includes operator, cassette, mounting brackets, and other components necessary for complete installation. FlexStyle Cassette Ascend as manufactured by Draper®, Inc.

SPRING OPERATOR: Balanced spring mechanism with metal roller. Adjuster ring built into the spring mechanism allows for finite adjustment of the torque output of the mechanism by turning it clockwise or counterclockwise. A built-in limiter prevents over extension of the spring mechanism.

CASSETTE: Ships fully assembled. Constructed of extruded aluminum. Can be wall or ceiling mounted. No fasteners visible from below, front, or slightly above. Curved or Square shape available.

FINISHES AVAILABLE: Black, White, Taupe, Warm White, Grey, or Textured Bronze. Fabric covered cassette also available (*without bottom closure only*).

MOUNTING BRACKETS: Spring-loaded wall or ceiling mounting brackets of plastic and steel. A minimum of two required per cassette. More may be required at the manufacturer's discretion.

ROLLER: Fabricated from extruded aluminum. Wall thickness and diameter selected by manufacturer to accommodate shade size.

FABRIC CONNECTION TO ROLLER TUBE: Fabric panel is attached with double-sided adhesive (*LSE*) specifically developed to attach coated textiles to metal to the roller tube at the top, and to the hem bar at the bottom. Adhesive attachment to eliminate horizontal impressions in fabric.

HEM BAR:


CLOSED POCKET ELLIPTICAL SLAT: 1 inch (25mm) aluminum elliptical slat inside of a 1 3/8 inch (41mm) pocket with heat sealed ends.

DOWNLOADABLE 3-PART SPECIFICATIONS:

www.draperinc.com

Please note: Dimensions of rollers, operators, and hardware at manufacturer's discretion.

Cassette Dimensions

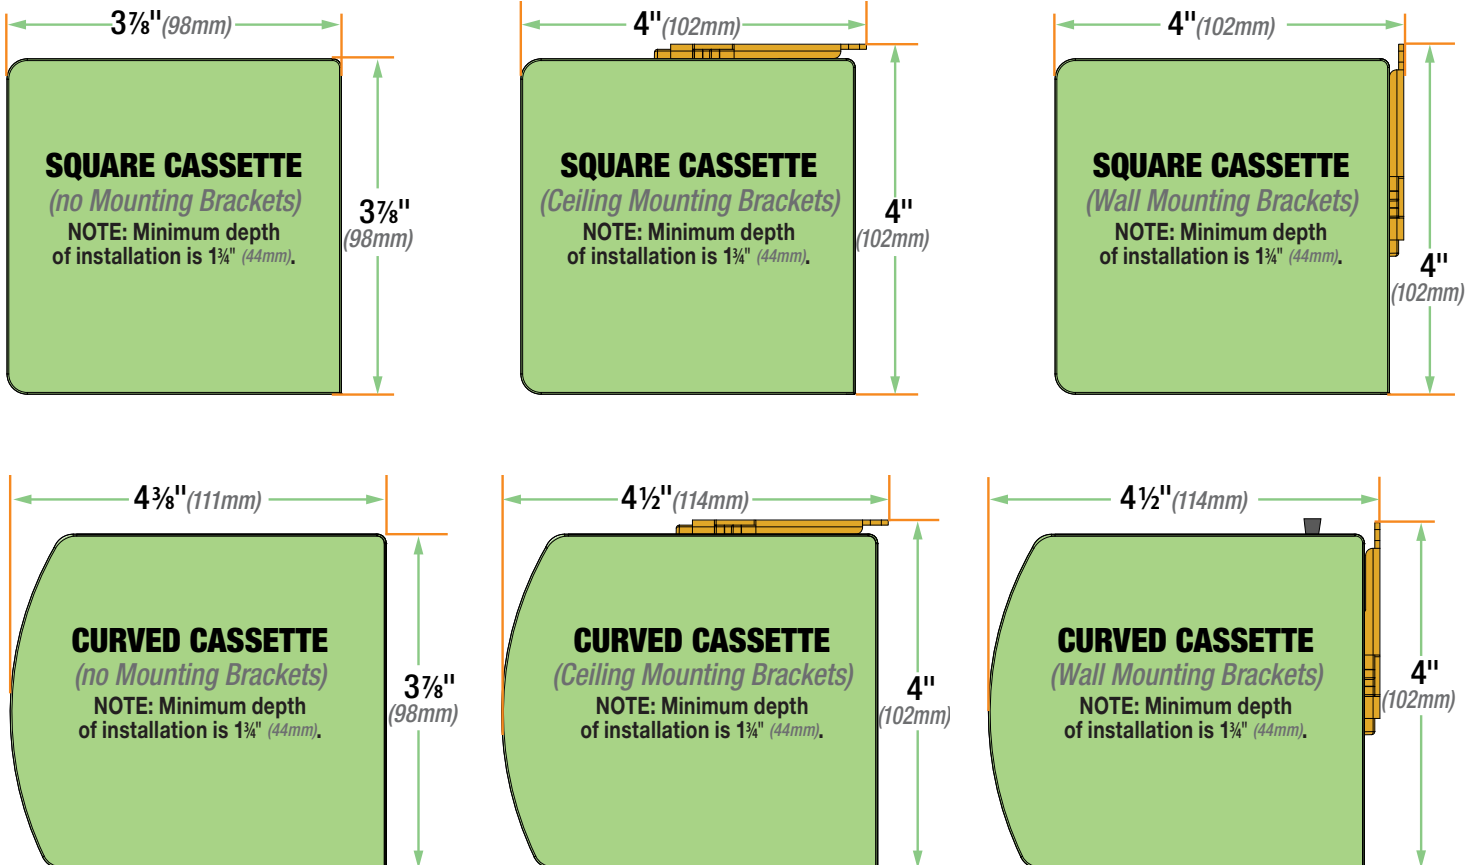

Shade Dimensions

