





STYLE PW4600 / 4500

**Style PW4600**  
(3% open)

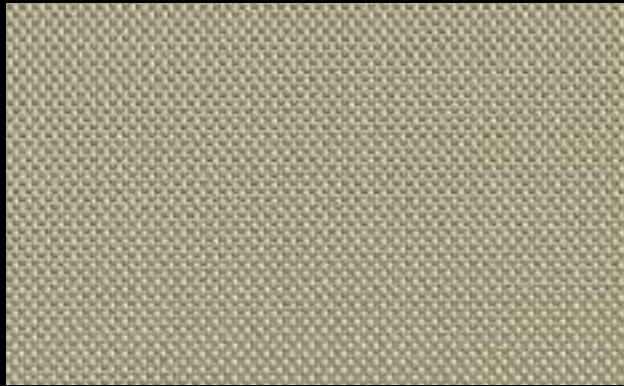

Q60 Golden Sand

**Style PW4500**  
(5% open)

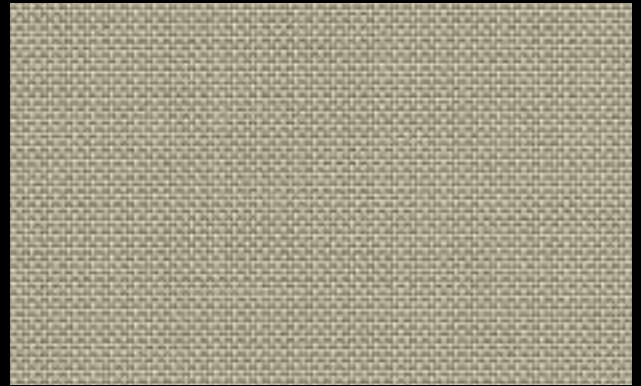


Q60 Golden Sand

**The above styles are also available in the colors shown below.**




P06 Chalk

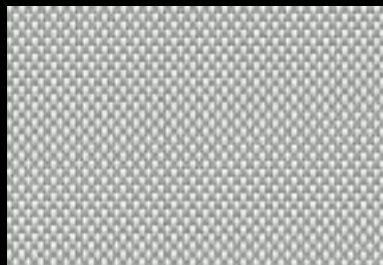

P10 Granite



Q59 Ecrú

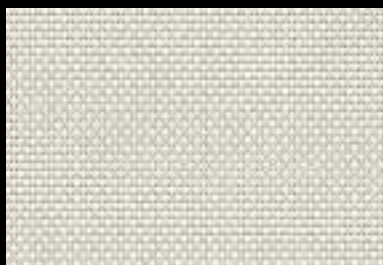


U32 Linen



V07 Pewter




V10 Ebony

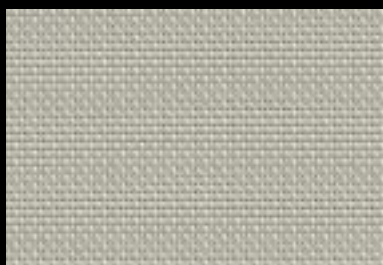

V44 Sandstone



V95 Cappuccino

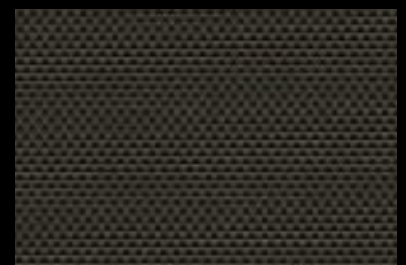

V96 Dark Bronze

# Sheerweave® Style PW4600 / 4500

Using advances in polyester yarn development, Styles 4600 and 4500 are thinner, lighter weight vinyl-coated polyester fabrics offered in 10 decorator colors. Woven in a 2x2 basketweave, these fabrics are ideal for applications where a more opaque and non-directional fabric is needed. Style 4600/4500 can also be used in exterior shading systems.

## SHEERWEAVE STYLE PW4600 / 4500

STANDARD WIDTH	<b>PW4600:</b> 63", 98" and 126" (160 cm, 248.9 cm and 320 cm) <b>PW4500:</b> 63", 98" and 126" (160 cm, 248.9 cm and 320 cm)	FABRIC THICKNESS	<b>PW4600:</b> 0.030 in (0.76 mm) <b>PW4500:</b> 0.024 in (0.61 mm)
ROLL LENGTH	30 Linear Yards (27.4 lm)	OPENNESS FACTOR	<b>PW4600:</b> Approximately 3% <b>PW4500:</b> Approximately 5%
COMPOSITION	<b>PW4600:</b> 22% Polyester, 78% Vinyl on Polyester <b>PW4500:</b> 17% Polyester, 83% Vinyl on Polyester	UV BLOCKAGE	<b>PW4600:</b> Approximately 97% <b>PW4500:</b> Approximately 95%
MESH WEIGHT	<b>PW4600:</b> 17.4 oz/yd <sup>2</sup> (589.97 g/m <sup>2</sup> ) <b>PW4500:</b> 14.4 oz/yd <sup>2</sup> (488.25 g/m <sup>2</sup> )	ACOUSTICAL VALUE	<b>PW4600:</b> NRC 0.20 / SAA 0.23 <b>PW4500:</b> NRC 0.15 / SAA 0.17
		ACOUSTICAL PERFORMANCE	NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a.

## SPECIFICATIONS

FIRE CLASSIFICATION	California U.S. Title 19 (small scale), NFPA 701 TM#1 (small scale), NFPA 101 (Class A Rating), IBC Section 803.1.1 (Class A Rating), BS 5867 Part 2 Type B Performance, NFPA 701 TM#2 (large scale), CAN/ULC-S 109 (large and small scale).
BACTERIA AND FUNGAL RESISTANCE	ASTM E 2180, ASTM G21, ASTM G22, AATCC30 Part 3, ASTM D 3273, GREENGUARD Mold and Bacteria Standard ASTM 6329; includes Microban antimicrobial additives.
ENVIRONMENTAL CERTIFICATION	Certified to GREENGUARD and GREENGUARD Gold standards for low chemical emissions into indoor air during product usage.
SAFE USE	RoHS/Directive 2002/95/EC, US Consumer Product Safety Commission Section 101, ANSI/WCMA A 100.1-2007 for lead content and REACH (EC 1907/2006) compliant.
STANDARD USES	Roller shades, Roman shades and panel tracks.
WARRANTY	10-year interior, 5-year exterior.

## TECHNICAL DATA

COLOR	OPENNESS NUMBER	SOLAR OPTICAL PROPERTIES								SHGC/G VALUE g-tot (glass & blind)			
		TS%		RS%		AS%		TV%		Single 1/4 CL		Insulating 1 HA	
		3%	5%	3%	5%	3%	5%	3%	5%	3%	5%	3%	5%
Chalk	P06	10	12	74	74	16	14	9	11	0.23	0.23	0.19	0.19
Granite	P10	5	6	43	47	52	47	7	8	0.40	0.37	0.27	0.26
Ecru	Q59	7	9	58	56	35	35	8	9	0.32	0.33	0.23	0.24
Golden Sand	Q60	6	7	37	37	57	56	7	8	0.44	0.44	0.29	0.29
Linen	U32	8	11	64	63	28	26	8	12	0.29	0.30	0.22	0.23
Pewter	V07	5	6	31	30	64	64	7	9	0.46	0.47	0.30	0.30
Ebony	V10	3	5	3	3	94	92	5	7	0.61	0.61	0.37	0.37
Sandstone	V44	5	8	39	40	56	52	6	9	0.42	0.42	0.29	0.29
Cappuccino	V95	4	6	20	18	76	76	6	9	0.52	0.53	0.33	0.34
Dark Bronze	V96	4	7	5	5	91	88	7	10	0.60	0.61	0.37	0.37



\*TS - Solar Transmittance, RS - Solar Reflectance, AS - Solar Absorptance, TV - Visual Transmittance \*SHGC = Solar Heat Gain Coefficient \*1/4 CL = 1/4" Clear Glass, 1 HA = 1" Heat Absorbing Glass \*Fabrics Installed Internally, Zero-Degree Profile Angle \*Solar Heat Gain Coefficient (SHGC) shown calculated according to Office of Building Technology, State and Community Programs, Energy Efficiency and Renewable Energy, U.S. Department of Energy's definition of SHGC. SHGC represents the percentage of solar heat gain that is transmitted to the interior through the glass and shading system. If you are using glass whose performance is listed in terms of SC, you may convert to SHGC by multiplying the SC by 0.87.

**PHIFER**  
INCORPORATED

® SheerWeave is a registered trademark of PHIFER INCORPORATED.  
® MICROBAN is a registered trademark of Microban Products Company.  
TM UL, the UL logos and the UL mark are trademarks of UL LLC.  
© PHIFER INCORPORATED V19