




Avila Twilight

0% Openness

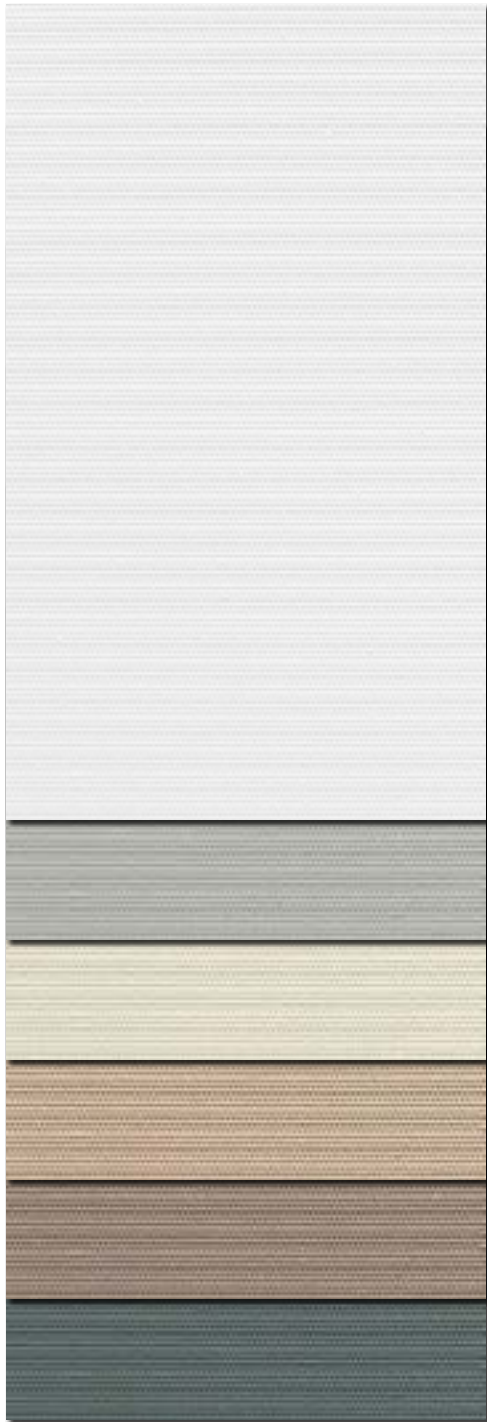

000002
White

000016
Chalk

000017
Canvas

000020
Linen

C00015
Khaki

000014
Marine

These colors have white on reverse side.



000101
Pewter

030030
Charcoal

006060
Black

These colors have the same color reverse side.

Digital sample of actual colors may vary slightly.

Avila Twilight

0% Openness

Specifications

Item Number	082336
Product Category	Privacy
Openness Factor	0%
% Polyester / % Acrylic	37.5% Polyester & 62.5% Acrylic
UV Blockage / approx.	100%
Fabric Style	Blackout

Dimensions

Standard Packaging	Rolls 30 ly (27 lm)
Width	118" (300 cm)
Weight	12.09 oz / yd ² (410 g / m ²) ± 10%
Thickness	0.017" (0.42 mm) ± 10%

Fenestration

			Fabric Properties				Fabric & Glass		Illuminance	
			Thermal Total Solar		Optical		SHGC % Improvement	Blackout %	Glow %	
COLOR	NUMBER	SIDE*	Rs%	As%	Ts%	Rv%	Tv%			
White	000002	Street side / Room side	65/81	35/19	0/0	71/88	0/0	58/66	97/97	3/3
Chalk	000016	Street side / Room side	63/66	37/34	0/0	70/70	0/0	55/55	99/99	1/1
Canvas	000017	Street side / Room side	65/75	35/25	0/0	71/79	0/0	58/63	96/96	4/4
Linen	000020	Street side / Room side	65/60	35/40	0/0	70/62	0/0	55/50	100/100	0/0
Khaki	C00015	Street side / Room side	65/39	35/61	0/0	71/41	0/0	58/37	100/100	0/0
Marine	000014	Street side / Room side	65/46	35/54	0/0	71/29	0/0	58/32	100/100	0/0
Pewter	000101	Street side / Room side	19/18	81/82	0/0	20/20	0/0	26/26	100/100	0/0
Charcoal	030030	Street side / Room side	9/38	91/62	0/0	9/15	0/0	18/24	100/100	0/0
Black	006060	Street side / Room side	4/4	96/96	0/0	4/3	0/0	16/16	100/100	0/0

*Street side: identified by the coated side; Room side: identified by the fabric side;

Cleaning

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. The front side of Avila is treated with DURAGUARD® Fabric Protector and can therefore be spot cleaned by gently blotting with a sponge or soft brush dipped in lukewarm soapy water using a mild detergent. The foam coating on the back side should not get wet. A dry chemical sponge or clean white pencil eraser can be used to remove small stains.

Classifications

Fire	NFPA 701-10 TM#1, California U.S. Title 19 CAN/ULC-S109 Small & Large scale
Bacterial & Fungal Resistance	ASTM E2180
Environmental Benefits	RoHS - Lead Free
Acoustical Performance	NRC: 0.05, SAA: 0.03

The fabric performance tests were conducted in accordance with ASTM E891 & ASTM E903-96: Solar Transmittance (Ts), Solar Reflectance (Rs), Solar Absorptance (As), Visible Reflectance (Rv), and Visible Transmission (Tv). Glass performance tests for Solar Heat Gain Coefficient (SHGC) were conducted using the Lawrence Berkeley National Laboratory Window 7.3 NFRC certified software. SHGC % improvement for commercial applications is based on a standard commercial glass makeup of Double Glazing 6 mm / ½" air / 6 mm with low E on surface #2. Results for SHGC were obtained using the center of glass. Acoustical performance was tested in accordance with ASTM C423-09a: NRC is Noise Reduction Coefficient, SAA is Sound Absorption Average. For up-to-date test results, performance specifications and larger samples, contact the Mermet Technical Department at: www.mermetusa.com.



For additional information, questions, or to request fabric samples, please contact Mermet's Technical Fabric Specialist at info@mermetusa.com or call toll free at 866.902.9647. www.mermetusa.com



411 S. Pearl St. | Spiceland, IN 47385
765.987.7999 | 800.238.7999
draperinc.com