# Ropewalker

Electric projection screen with cable drop

#### Specifications

\_\_\_\_\_(Qty.) Projection screens, size \_\_\_\_\_h. x \_\_\_\_w., ceiling-recessed, [free-hanging] [tab-tensioned] projection screen for use in high ceilings without black drop between the screen and ceiling.

- OPERATOR: Electrically operated [60 Hz., 110-120V AC] [50 Hz., 220-240V AC] 5-wire motor with a 3A current draw mounted inside screen roller, instantly reversible, lifetime lubricated, with internal thermal overload protector and electric brake with preset limits.
- EXTERNAL RECESSED CASE: 18-gauge steel, 14 ½"(36.8cm) deep x 16 ¾"(42.5cm) high (including mounting brackets and bottom perimeter flange to provide support and trim for acoustical ceiling panels and trim for gypsum board ceiling).

INTERNAL SCREEN HOUSING: 18-gauge steel.

**OPERATION:** Roller with external drive mechanism engages the end of the fabric roller and lowers the viewing surface. Once the fabric is unrolled the mechanism disengages and then the inner case assembly is lowered into the room by a 5" (12.7 cm) OD roller tube via galvanized steel aircraft cables.

- MAXIMUM DROP FROM RECESSED HOUSING: 34' (10.4 m). Approximate travel speed: 20' (6.1 m) per minute (120V) or 17' (5.2 m) per minute (220V).
- **SAFETY MECHANISM:** Built-in fall arrester designed to engage instantly whenever a cable or supporting structure fails. Cable arrestor is actuated by speed or inertia in order to stop a load from falling due to a sudden failure such as a cable breakage, cable clamp failure or any increase in speed due to failure. Cable arrester incorporates  $3^{km}$  (*Smn*) diameter, 7x19 galv. cable with a breaking strength rating of 6000 lbs (2,721 Kg) and will withstand a 1750 lb (794 Kg) free falling load without any failure of components or the belt. The housing and drum is manufactured from high tensile heat treated aluminum alloy. The locking mechanism always remains in the ready position regardless of whether cable is retracting or extending. Locking mechanism does not cycle constantly. The maximum free fall distance is 24" (*61cm*) of able travel in the event of failure. The locking mechanism.

TENSIONED VIEWING SURFACES: Mildew resistant, with black masking borders. Each side of surface includes tab guide cable system to maintain even lateral tension and hold surface flat. Tabs are integrated into the cut of the screen material then electronically welded. Bottom of surface supported and masked by black, extruded aluminum dowel weighted to apply proper vertical tension. Top of surfaces masked by 12" (30cm) black drop. Matt White XT1000V and Grey XH600V viewing surfaces are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage.

JBMI

TECHNICAL INFO

- SELF-SUPPORTING VIEWING SURFACES: Viewing surface flame and mildew resistant. Matt White XT1000E and Contrast Grey XH800E viewing surfaces are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg.
- **LOW-VOLTAGE CONTROL** (*OPTIONAL*): is a commercial type 110-120V AC or 220-240V AC control operation. Low-Voltage Control is capable of operating one electric motor with up to a 1 HP rating. Control is factory wired and installed in an 6" x 4" x 2½" (*152mm x 102mm x 64mm*) enclosure with a 6' 0" (*1.83m*) long power cord with a four-prong NEMA style twist lock grounded plug. Control includes a three-position terminal block mounted on the enclosure for an optional low-voltage key switch for motor control or controlled by control system with momentary contact closure. All wiring and electrical components are to be in accordance with local codes and as per manufacturers installation instructions. All conduits, wiring, and electrical components not specified herein, is supplied by the electrical cortractor.
- HANDHELD RF REMOTE CONTROL TRANSMITTER (OPTIONAL): Power supply for handheld is a standard 9-Volt battery. Operating range for handheld transmitter approximately 100' (30.5m).

PATENT INFORMATION: Available at www.draperinc.com/legal/patents.

DOWNLOADABLE 3-PART SPECIFICATIONS: www.draperinc.com/documents.aspx. Entire unit certified by Underwriters' Laboratories, Inc. for the U.S. and Canada.

Please note: Dimensions of rollers, operators, and hardware at manufacturer's discretion.

Please check all appropriate selections and attach room schedule with verified dimensions.

#### Select Main Case Color

	White (standard)  Black (optional)					
Selec	t Screen Case Color					
	White (standard)  Black (optional)					
Scree	en Travel Distance:					
	Distance from trim flange of Ropewalker case to top of screen case:					
	Select Voltage:					
Selec	t Controls:					
	Standard Single Station Switch (SS-1R)					
	Power Supply Key Operated Switch (on-off)					
	Low-Voltage Control (115V only) Handheld RF Remote Total number of Low-Voltage					

_	
	Total number of Low-Voltage
	Switches (operate independently):

OptiView (Self-Supporting Screen Su	rface)	₩т		Duomium	Optical Surface
Matt White XT1000E (1.0 gain)		<b>V</b> _'	XH700X Grey (0.)		
Grey XH800E (0.8 gain)		H	XH800X UST AL		
			XH900X ALR (0.9		
OptiFlex (Tensioned Screen Surface)			MS1000X ALR (1		
Matt White XT1000V (1.0 gain)			CS1000X ALR (1.	· · ·	
(GREENGUARD Gold Certified)			CS1200X ALR (1.		
Grey XH600V (0.6 gain)			XT1000X White (		
(GREENGUARD Gold Certified)	GREENGUARD		XT1100X White ( XT1300X White (	0 /	
Pure White XT1300V (1.3 gain)	PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS		XT1600X White (	0 /	
neFlex (Rear Projection Tensioned	ULCOM/GG UL 2818 GOLD		XT1800X White (	1.8 gain) 👪	Certified
CineFlex CH1200 (1.2 gain)					
CineFlex White XT700V (0.7 gain)					
Other:					



Draper, Inc. | 411 S. Pearl St. Spiceland, IN 47385 draperinc.com | 765.987.7999 | 800.238.7999 © 2023 All Rights Reserved | **FORM: Ropewalker\_Sub\_23** 

PROJECT:	
ARCHITECT:	
CONTRACTOR:	
SUPPLIER:	
DATE:	REVISED:

## page 2 of 4

# Ropewalker

#### **Dimensions and Data**


Ropewalker E: 16:10 HDTV					
DIAG.	CASE LENGTH	NET WT.	QTY.		
<b>76"</b>	<b>123 %"</b>	424.8 lb			
(193cm)	(314cm)	(192.7kg)			
<b>85"</b>	<b>128 ½"</b>	<b>435 lb</b>			
(216cm)	(325cm)	(197.3 kg)			
<b>94"</b>	<b>137 %"</b>	453.6 lb			
(239cm)	(350cm)	(205.7kg)			
<b>109"</b>	<b>150 ½"</b>	480.3 lb			
(277cm)	(381cm)	(217.8kg)			
<b>113"</b>	<b>154 ½"</b>	488.5 lb			
(287cm)	(391cm)	(221.6kg)			
<b>123"</b>	<b>162 ½"</b>	505 lb			
(312cm)	(412cm)	(229.1kg)			
<b>137"</b> (348cm)	<b>174</b>	529.7 lb (240.3kg)			
<b>165"</b>	<b>198 ½"</b>	579.1 lb			
(419cm)	(503cm)	(262.7kg)			
<b>189"</b>	<b>218 ½"</b>	620.3 lb			
(480cm)	(554cm)	(281.4kg)			
<b>198"</b>	<b>226</b> 1⁄8"	636.7 lb			
(503cm)	(574cm)	(288.8kg)			
<b>222"</b>	<b>246</b> 1⁄8"	677.9 lb			
(564cm)	(625cm)	(307.5kg)			
<b>255"</b> (648cm)	<b>274</b>	735.5 lb (333.6kg)			
Custo	m Size				

Ropewalker V: 16:10 HDTV				
DIAG.	CASE LENGTH	NET WT.	QTY.	
<b>76"</b>	<b>125</b> 1/8"	<b>421 lb</b>		
(193cm)	(318cm)	(191 kg)		
<b>85"</b>	<b>134"</b>	438.5 lb		
(216cm)	(340cm)	(199kg)		
<b>94"</b>	<b>142"</b>	454.2 lb		
(239cm)	(361cm)	(206kg)		
<b>109"</b>	<b>154"</b>	477.6 lb		
(277cm)	(391cm)	(216.6kg)		
<b>113"</b>	<b>159"</b>	487.4 lb		
(287cm)	(404cm)	(221.1kg)		
<b>123"</b>	<b>167"</b>	503 lb		
(312cm)	(424cm)	(228.2kg)		
<b>137"</b>	<b>179"</b>	526.5 lb		
(348cm)	(455cm)	(238.8kg)		
<b>165"</b>	<b>204</b> 1/8"	582.2 lb		
(419cm)	(518cm)	(264.1kg)		
<b>189"</b>	225 %"	624.1 lb		
(480cm)	(573cm)	(283.1kg)		
<b>198"</b>	<b>233 %"</b>	640.1 lb		
(503cm)	(593cm)	(290.3kg)		
<b>222"</b>	258 1/8"	690.1 lb		
(564cm)	(656cm)	(313kg)		
<b>255"</b>	283 ¾"	740 lb		
(648cm)	(721cm)	(335.7kg)		
Custo	m Size	27		

Ropewalker E: 16:9 HDTV					
DIAG.	CASE LENGTH	NET WT.	QTY.		
<b>73"</b>	<b>123 %"</b>	424.8 lb			
(185cm)	(314cm)	(192.7kg)			
<b>82"</b>	128 1/8"	<b>435 lb</b>			
(208cm)	(325cm)	(197.3 kg)			
<b>92"</b>	<b>137 %"</b>	453.6 lb			
(234cm)	(650cm)	(205.7kg)			
<b>100"</b>	145 1/8"	470 lb			
(254cm)	(369cm)	(213.2kg)			
<b>106"</b>	150 1/8"	480.3 lb			
(269cm)	(381cm)	(217.8kg)			
<b>110"</b>	<b>154</b> %"	488.5 lb			
(279cm)	(391cm)	(221.6kg)			
<b>119"</b>	162 1/8"	505 lb			
(302cm)	(412cm)	(229.1kg)			
<b>133"</b>	<b>174</b> %"	529.7 lb			
(338cm)	(442cm)	(240.3kg)			
<b>161"</b>	198 1/8"	579.1 lb			
(409cm)	(503cm)	(262.7kg)			
<b>184"</b>	218 1/8"	620.3 lb			
(467cm)	(554cm)	(281.4kg)			
<b>193"</b>	226 1/8"	636.7 lb			
(490cm)	(574cm)	(288.8kg)			
<b>220"</b>	246 1/8"	677.9 lb			
(559cm)	(625cm)	(307.5kg)			
<b>248"</b>	<b>274</b> %"	735.5 lb			
(630cm)	(696cm)	(333.6kg)			
Custo	m Size				

Ropewalker V: 16:9 HDTV					
DIAG.	CASE LENGTH	NET WT.	QTY.		
<b>73"</b>	<b>125 ½"</b>	<b>421 lb</b>			
(185cm)	(318cm)	(191 kg)			
<b>82"</b>	<b>133 ½"</b>	436.6 lb			
(208cm)	(338cm)	(198kg)			
<b>92"</b>	<b>142"</b>	454.2 lb			
(234cm)	(361cm)	(206kg)			
<b>100"</b>	<b>149"</b>	467.8 lb			
(254cm)	(378cm)	(212.2kg)			
<b>106"</b>	<b>154"</b>	477.6 lb			
(269cm)	(391cm)	(216.6kg)			
<b>110"</b>	<b>158"</b>	485.4 lb			
(279cm)	(401cm)	(220.2kg)			
<b>119"</b>	<b>166"</b>	501.1 lb			
(302cm)	(422cm)	(227.3kg)			
<b>133"</b>	<b>179"</b>	526.5 lb			
(338cm)	(455cm)	(238.8kg)			
<b>161"</b>	<b>204</b> 1/8"	582.2 lb			
(409cm)	(518cm)	(264.1kg)			
<b>184"</b>	<b>224</b> 1/8"	622.1 lb			
(467cm)	(569cm)	(282.2kg)			
<b>193"</b>	<b>233 %"</b>	640.1 lb			
(490cm)	(593cm)	(290.3kg)			
<b>220"</b>	<b>258 ½"</b>	690.1 lb			
(559cm)	(656cm)	(313kg)			
<b>248"</b>	<b>282</b> %"	738 lb			
(630cm)	(717cm)	(334.8vvkg)			
Custom Size					

### Components

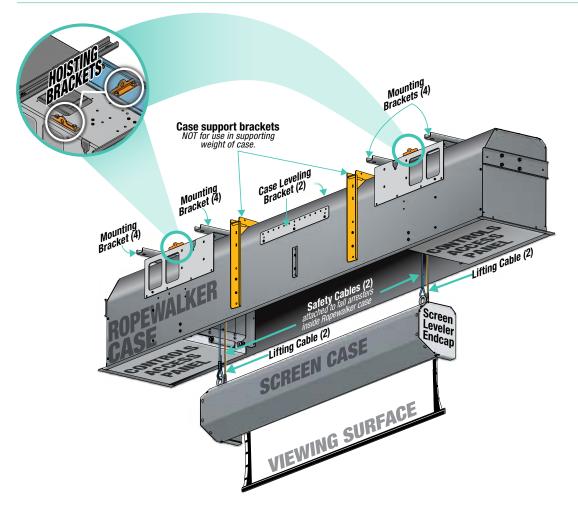


Standard Control Switch (SS-1R)



Single switches require a standard switch box that measures 3" (76mm) high x 2¼" (57mm) wide x 2½" (64mm) deep. Install optional control switch in accordance with wiring diagram.


#### Low-Voltage RF Receiver





# Ropewalker

Details

### Dimensions

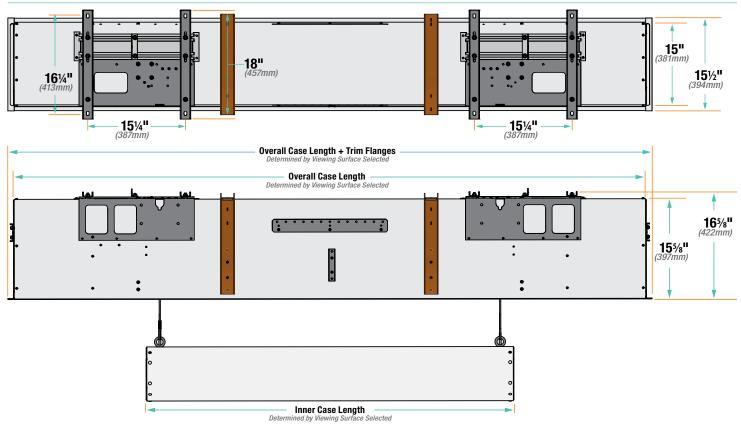







## **Ropewalker**

Ropewalker Wiring


### **Single Station Control**




Ropewalker Wiring for Low-voltage Control

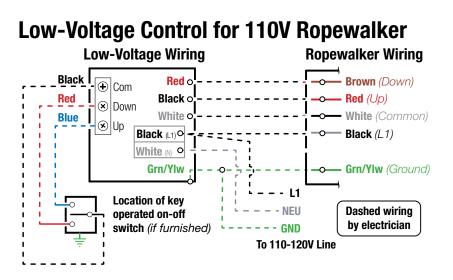

220V Wiring Diagrams

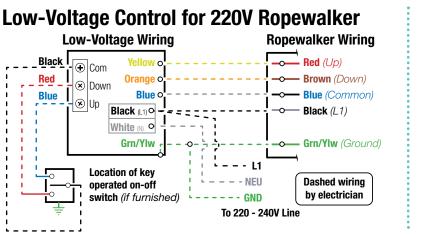



switch (if furnished)

L1 To 220-240V Line

Ν

by electrician

### Single Station Control