

Technical Data Sheet

VIC-115 Video Interface Control By Draper

USES: The VIC-115 replaces the standard single-station control switch for all screens or shades where a 115 volt trigger circuit is turned on to lower the product, and turned off to raise the product..

COMPATIBILITY: The VIC-115 is intended as the sole control, and cannot be used with any other control, except the optional override switch (VIC-OS).
Please Note: If VIC-115 is built-in, VIC-OS cannot be used.


CONTACTS: Single-Pole, Double-Throw (Common, Normally Closed, Normally Open).

RATING: Contacts: 240 Volts, 10 A; 28V DC, 15 A, UL recognized, CSA recognized.
Coil: 110/120V AC.
Requires 100 MilliAmps input.

DESCRIPTION: A relay with COM/NC/NO contacts, and a 120V coil, housed in a metal box.
Box measures 3" x 4" x 5" and has three pigtails leading from it:
a. A 7½ ft. black cord with 3-pronged plug for constant 115V AC.
b. An 8½ ft. white cord with 2-pronged plug for switched 115V AC.
c. Four 6" wire leads for the motor: blue, red, white, green (up, down, neut., grd).

PART NUMBER: 121026

ILLUSTRATION:

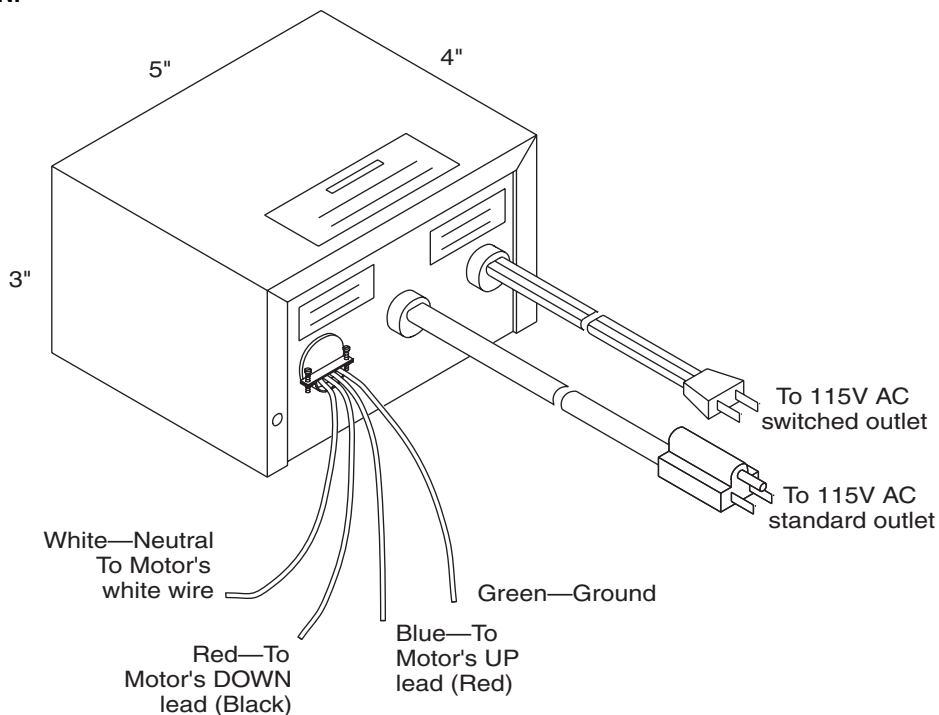

DRAPER®

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999
www.draperinc.com ■ fax 765-987-7142