

# Steel In-Ground Soccer Goals

Soccer Goals  
and Accessories

by DRAPER

**Please Mark Appropriate Selections**

**Select Soccer Goal**



- 505006—Official 24' x 8' In-Ground

**Select Soccer Net**

- 505015—24' x 8' x 4' x 10' (for use with backstays)
- 505016—24' x 8' x 0' x 8'

**Select Options**

- 505007—European Style Soccer Goal Backstays (For 4' top depth net)
- 505009—Ground Sleeve

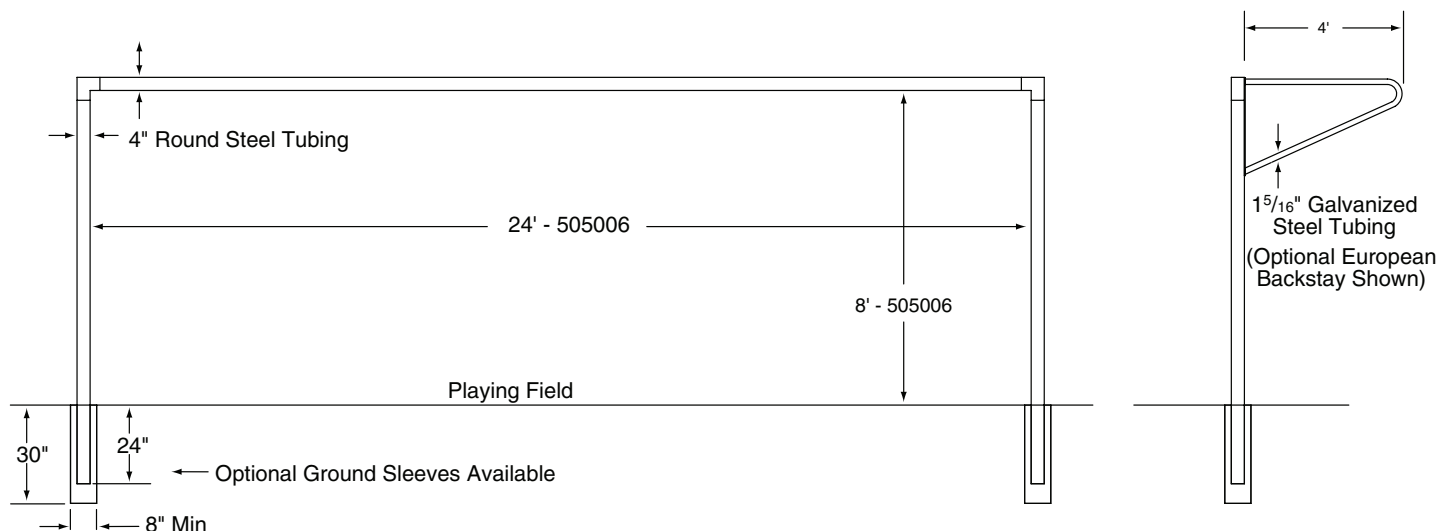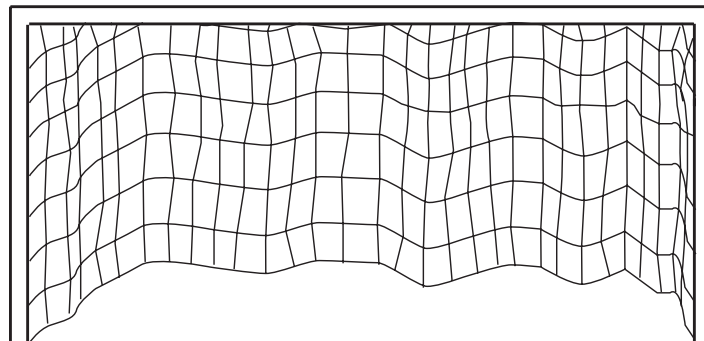

DRAPER®

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999  
www.draperinc.com ■ fax 765-987-7142  
Copyright © 2009 Draper Inc. Form SteelInGroundSoccerGoals\_Sub09 Printed in U.S.A.

PROJECT: \_\_\_\_\_

\_\_\_\_\_

ARCHITECT: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SUPPLIER: \_\_\_\_\_

DATE: \_\_\_\_\_ REVISED: \_\_\_\_\_

# Steel In-Ground Soccer Goals

## **Specifications—Official Steel In-Ground Goals**

In-Ground Soccer Goals shall be provided by Draper, Inc., of Spiceland, IN.

**505006 Official Size**—Face of goal shall be constructed of 4" round steel tubing with a minimum 14 ga. wall thickness. Goal shall have a 24' wide and 8' high opening.

Design shall allow for 24" of upright to be buried in a 30" deep footing or installed in optional 505009 ground sleeves.

Crossbar shall attach to uprights by means of ½" grade 5 bolts that do not protrude from the front or rear face of the goal. Uprights shall be factory prepped to allow attachment of optional 505007 European Style backstay.

All components shall be finished with white polyester powder coated finish. Goals shall meet all NCAA, NF and FIFA rules and carry a one-year warranty.

Net shall attach by means of net clips.

System shall weigh approximately 300 lbs. per pair.

## **Specifications—Twisted Nylon Soccer Nets**

Net shall be constructed of 3.5 mm minimum high-strength twisted nylon cord mesh with a minimum of 5.5" square openings.

Net shall have finished rope edges.

**505015**—Net shall have a 24' width, an 8' height, a 10' bottom depth and a 4' top depth. Shipping weight shall be approximately 20 lbs. pair. Net color: orange.

**505016**—Net shall have a 24' width, an 8' height, an 8' bottom depth and a 1' top depth. Shipping weight shall be approximately 20 lbs. pair. Net color: white.

## **Specifications—505007 European Style Backstays**

Backstays shall be constructed of 1<sup>5</sup>/<sub>16</sub>" diameter, galvanized steel tubing formed to provide a 4' goal top depth. Mounting hardware included to mount to Draper in-ground steel soccer goals.

## **Specifications—505009 Ground Sleeve for Steel In-Ground Soccer Goals**

Sleeves shall be constructed of extruded aluminum and require bury in a 8" x 30" minimum footing. Actual sleeve depth shall be 24" and be designed to allow removal of 4" uprights on steel in-ground soccer goals.

Sleeve shall have a locking cap and shall be sold in sets of four sleeves to allow installation of one pair of soccer goals. Set of four sleeves shall weigh 28 lbs.

**Downloadable 3-part specifications  
are available at [www.draperinc.com](http://www.draperinc.com).**