

Football-Soccer Goal Post Combo

by DRAPER

Specifications—505117 Combination Football/Soccer Goals for High School or College

Football and Soccer Goal Post Combo shall be 505117 Football/Soccer Goal Post Combo by Draper, Inc., of Spiceland, IN.


Goals shall be designed to accommodate official 24' x 8' soccer and either high school or college football. Soccer uprights are 2" x 4" x 14 gauge rectangular steel tubing and bury a minimum of 24" into 18" x 30" deep concrete footing. Welded ladder style cross bar is constructed of 2" x 3" x 14 gauge rectangular steel tubing. Ladder style cross bar assembly comes in two sections that is field assembled to achieve required 24' width and when installed results with bottom edge at 8' to serve as soccer cross bar and the top edge at 10' as the football cross bar. Football uprights are 2" x 2" x 14 gauge square steel tubing and extend 10' above 10' high cross bar. Entire frame assembly and uprights shall be finished in a durable white powder coat.

Football uprights shall be placed at either official high school width of 23'4" or official college width of 18'6" between the uprights. Rear of goal shall be fitted with removable traditional style 4' deep backstays constructed of 1⁵/₈" diameter galvanized steel tube and provide 9' bottom net depth.

Goal frame shall include soccer net attachment clips. Specify Draper model 505015, 24' x 8' x 4' x 10' twisted nylon net separately. All hardware shall be zinc plated grade 5 minimum. Shipping weight shall be 816 lbs.

505117 Combination Football/Soccer Goal is designed to need NFHS requirements for competition football and soccer.

Optional aluminum ground sleeves (505098) available for semi-permanent installations.

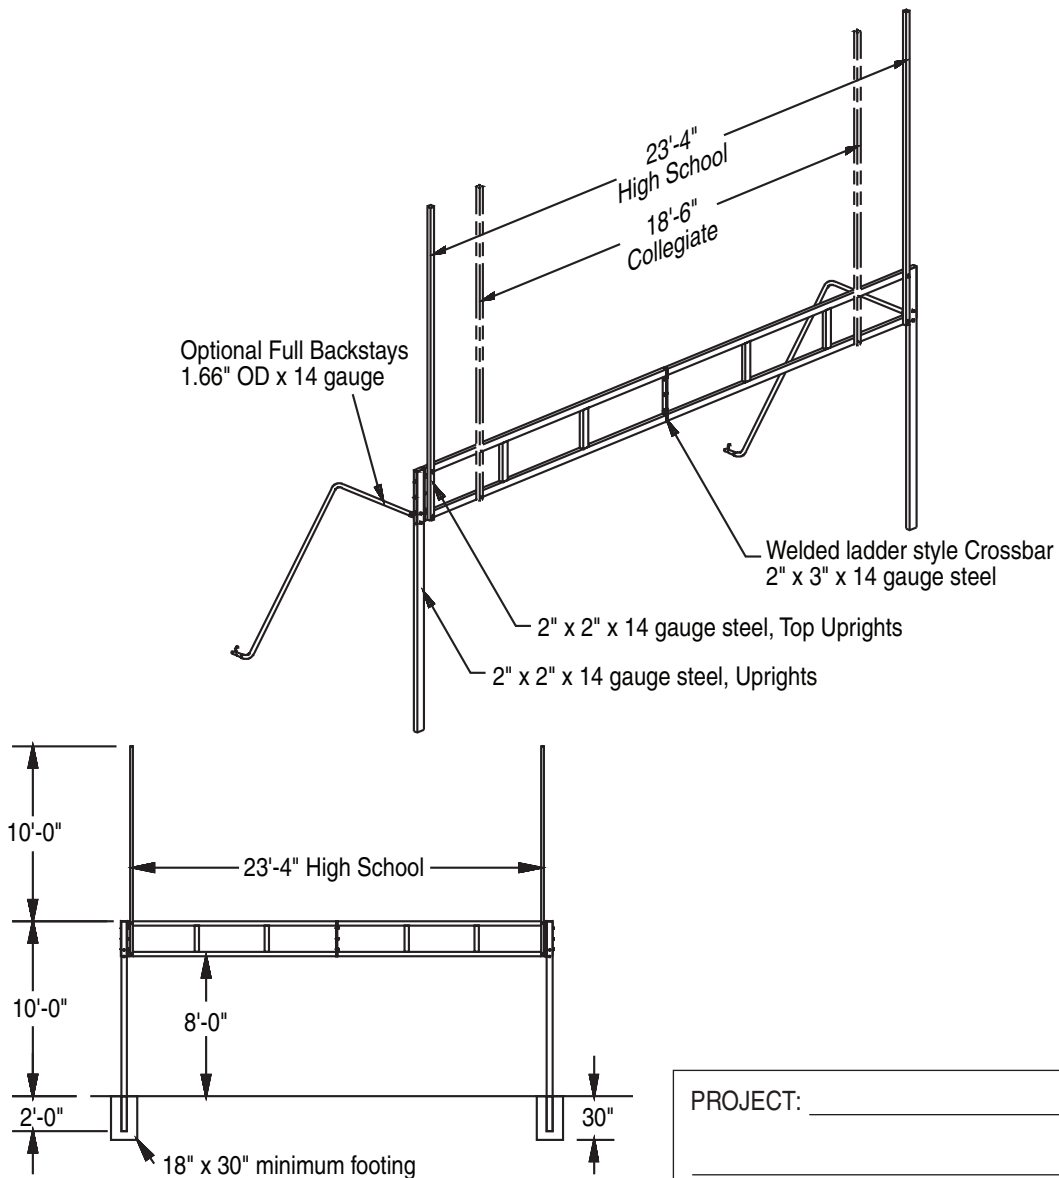

DRAPER

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999

www.draperinc.com ■ fax 765-987-7142

Copyright © 2015 Draper Inc. Form Football-SoccerCombo_Sub15 Printed in U.S.A.

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____