

TECVISION CS1200X ALR

REJECTS 82% OF AMBIENT LIGHT

SUPERIOR CONTRAST/NARROW VIEWING CONE/ON-AXIS GAIN OF 1.2

This premium optical surface is engineered for very high contrast, precise resolution and color accuracy. CS1200X ALR performs very well in spaces where there is high ambient light and narrow viewing angles. Like all TecVision surfaces CS1200X ALR offers superior quality, consistency, uniformity and is 8K ready. Also available with an acoustically transparent nano perforated surface in limited sizes.

- Lens/Throw distance ratio for best brightness uniformity: 1.7:1 or longer.

SURFACE CHARACTERISTICS

- Maximum Image Height: 276" (701 cm) Always optically seamless
- Weight (g/sm): 441
- Thickness (mm): .36
- Cleaning: Mild soap and soft cloth
- Flame and mildew resistant
- Composition: Flexible PVC


REFLECTIVE PERFORMANCE*

- Gain Chart—See below
 - 0° Gain: 1.2
 - Half Gain Angle: 18°
 - ALR: 82%
- *Individual test results may vary slightly.*




The TecVision Family of Surfaces

TecVision™ Engineered Surface Technology is offered in several exclusive formulations on Draper tab-tensioned and permanently tensioned screens. These formulations are designed to optimize performance and color fidelity in a broad range of settings and at a variety of light levels. White surfaces with gains ranging from 1.0 to 1.8 provide remarkably wide viewing cones. ALR (Ambient Light Rejection) surfaces offer excellent performance under higher room light levels. Other formulations offer performance needed for specific applications like blending and short throw applications in controlled ambient light, or 3-D.

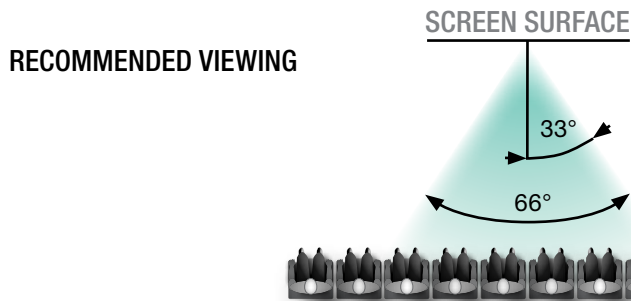

A minimum distance of 2x the image height to the closest viewer is recommended.

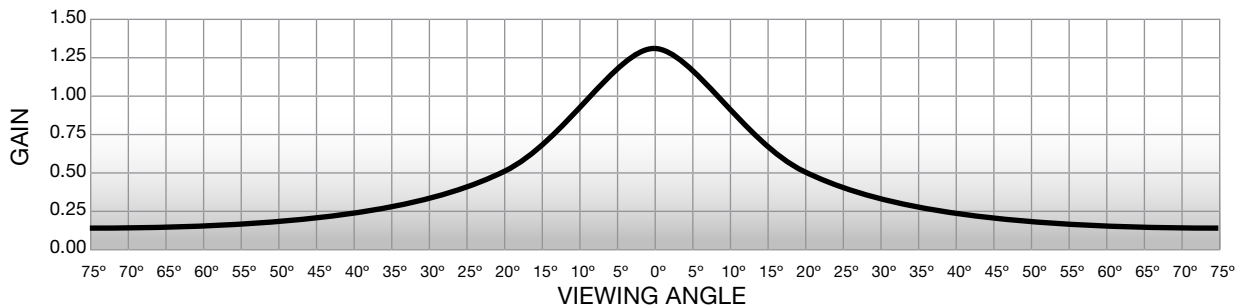

GAIN CHART TECVISION CS1200X ALR