


T Screen[™]

3% Openness

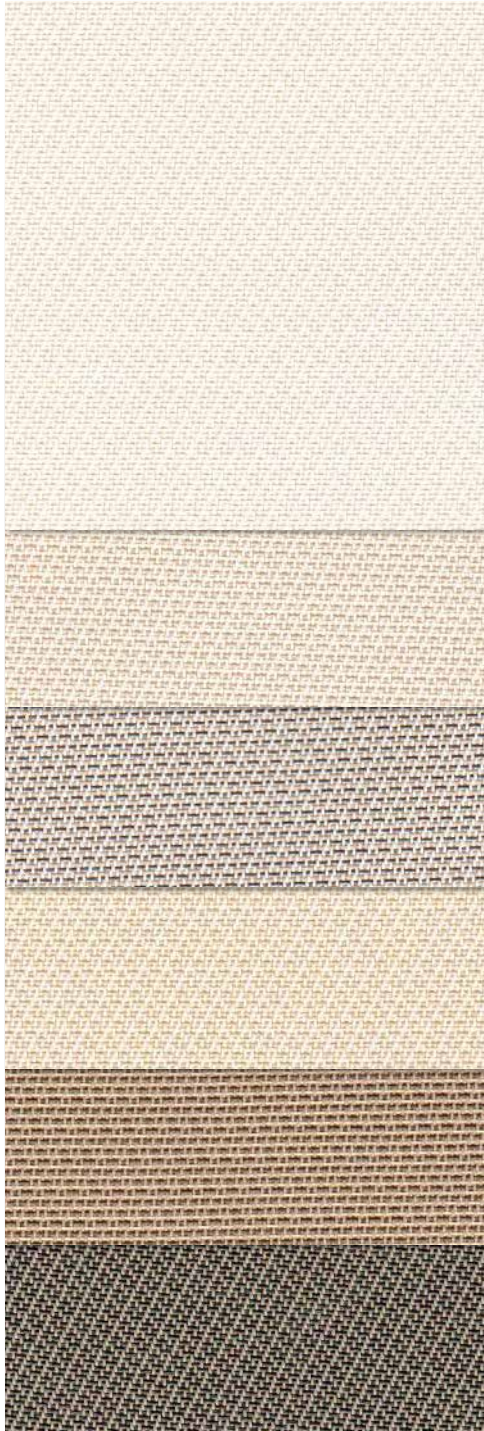

002020
White/Linen


00M151
White/
Sable-Straw

00M164
White/
Sable-Cocoa

00M163
White/
Sable-Mustard

00M153
Sable/
Straw-Cocoa

010030
Sable/Charcoal

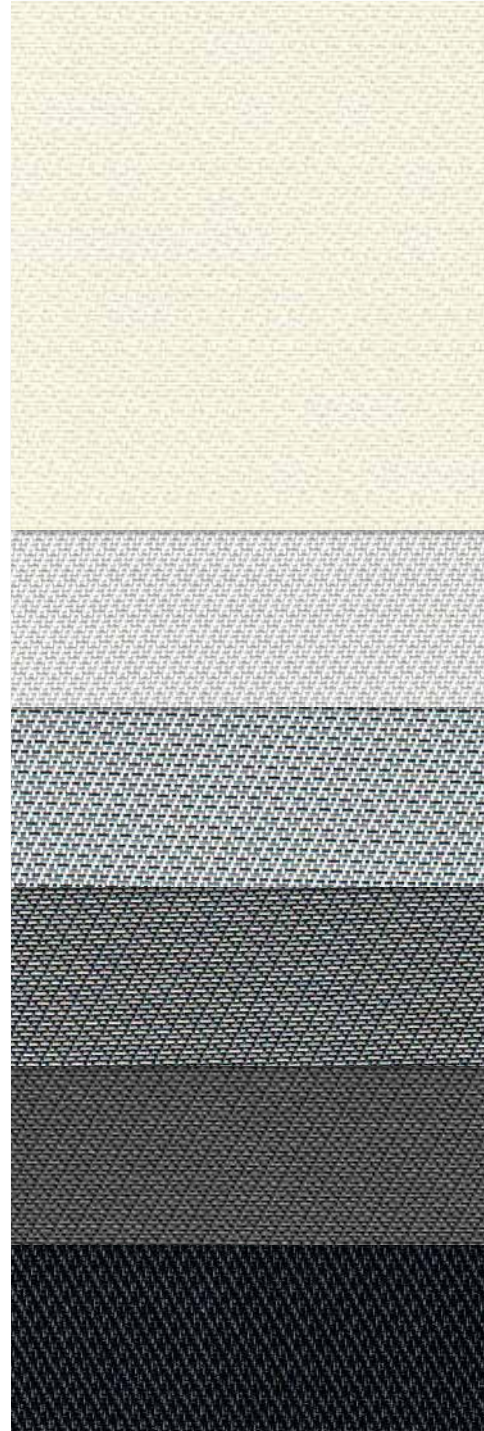

002002
White/White

002007
White/Pearl

00M116
White/
Charcoal-Grey

000M85
Charcoal/
Linen-Pearl

030001
Charcoal/Grey

030030
Charcoal/
Charcoal

Digital sample of actual colors may vary slightly.

Specifications 3%

Item number	009803
Product category	Decorative
Openness factor	3%
Composition	36% Fiberglass, 64% Vinyl
UV Blockage (approx.)	97%
Fabric style	Offset Twill

Dimensions

Standard Packaging	Rolls 30 ly (27 lm)
Width	98" (250 cm)
Weight	11.6 oz / yd ² (395 g / m ²) ± 5%
Thickness	.025" (0.64 mm) ± 5%

Fenestration

Fabric Properties

Fabric & Glass

COLOR	NUMBER	SIDE*	Thermal Total Solar			Optical		Commercial SHGC % Improvement		Residential SHGC	
			Rs%	As%	Ts%	Rv%	Tv%	Interior	Exterior	Interior	Exterior
White/Linen	002020	Street / Room	66/61	17/22	17/17	70/64	13/14	53/47	79/79	0.32/0.35	0.15/0.15
White/Sable-Straw	00M151	Street / Room	64/56	21/28	15/16	67/57	12/13	50/42	82/79	0.33/0.38	0.13/0.15
White/Sable-Cocoa	00M164	Street / Room	59/44	30/44	11/12	63/45	9/9	47/34	84/82	0.35/0.44	0.11/0.13
White/Sable-Mustard	00M163	Street / Room	64/56	21/28	15/16	67/57	12/13	50/42	82/79	0.33/0.38	0.13/0.15
Sable/Straw-Cocoa	00M153	Street / Room	34/31	57/59	9/10	32/30	6/7	26/26	84/84	0.49/0.51	0.11/0.12
Sable/Charcoal	010030	Street / Room	25/15	68/77	7/8	25/16	6/6	24/18	84/82	0.53/0.58	0.11/0.12
White/White	002002	Street / Room	70/70	12/12	18/18	75/75	15/15	55/55	79/79	0.30/0.30	0.15/0.15
White/Pearl	002007	Street / Room	60/49	28/38	12/13	65/52	10/11	47/39	84/79	0.34/0.41	0.12/0.14
White/Charcoal-Grey	00M116	Street / Room	54/36	37/54	9/10	58/38	7/8	45/32	87/82	0.37/0.48	0.10/0.12
Charcoal/Linen-Pearl	00M85	Street / Room	8/18	88/77	4/5	9/20	4/4	16/21	84/84	0.61/0.56	0.11/0.10
Charcoal/Grey	030001	Street / Room	6/11	90/84	4/5	6/10	4/4	13/16	84/84	0.62/0.60	0.11/0.11
Charcoal/Charcoal	030030	Street / Room	4/4	93/93	3/3	4/4	3/3	13/13	84/84	0.63/0.63	0.10/0.10

*Street side: identified by the dominant diagonal line moving down toward the right. Room side: identified by the dominant diagonal line moving up toward the right.

Care and Handling

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.

Classifications

Fire	NFPA 701-10 TM#1, California U.S. Title 19, CAN/ULC-S109-03 Small & Large Flame Test
Bacterial & Fungal Resistance	ASTM E2180, ASTM G21
Environmental Benefits	RoHS - Lead Free
Acoustical	NRC: 0.15, SAA: 0.15

The fabric performance tests were conducted in accordance with ASTM E891 & ASTM E903-96: Solar Transmittance (Ts), Solar Reflectance (Rs), Solar Absorbance (As), Visible Reflectance (Rv), and Visible Transmission (Tv). Glass performance tests for Solar Heat Gain Coefficient (SHGC) were conducted using the Lawrence Berkeley National Laboratory Window 7.3 NFRC certified software. SHGC % improvement for commercial applications is based on a standard commercial glass makeup of Double Glazing 6 mm / ½" air / 6 mm with low E on surface #2. SHGC for residential applications is based on a default residential glass makeup of 3mm clear glass / ½" air / 3mm clear glass. Results for SHGC were obtained using the center of glass. Acoustical performance was tested in accordance with ASTM C423-09a: NRC is Noise Reduction Coefficient, SAA is Sound Absorption Average. For up-to-date test results, performance specifications and larger samples, contact the Mermet Technical Department at: www.mermetusa.com.



For additional information, questions, or to request fabric samples, please contact Mermet's Technical Fabric Specialist at info@mermetusa.com or call toll free at 866.902.9647. www.mermetusa.com



411 S. Pearl St. | Spiceland, IN 47385
765.987.7999 | 800.238.7999
draperinc.com